






# KSD

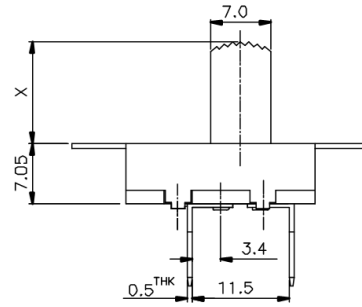

NON-SHORTING  
SCHEMATIC

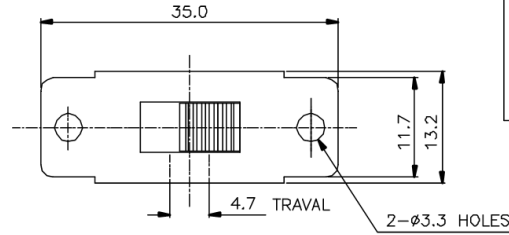

X =

MARKING: SIDE A: **KSD** 标志

SIDE B: U11 AC 125V 11A  
AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH	1P1T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO:	U11SS-11J02-G
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m	DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20	APPD.
	OPERATION FORCE: 700±250g		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)		
BY:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	930589-02
DATE:			