


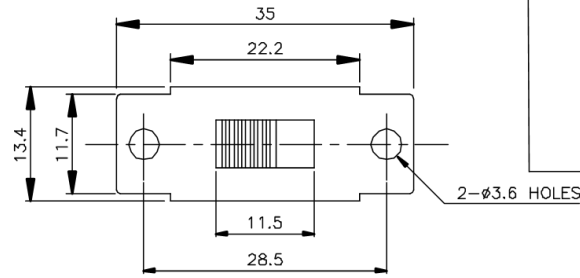


KSD

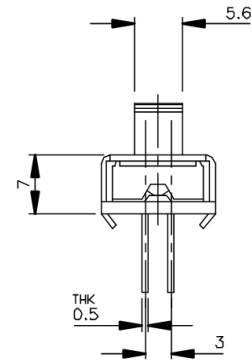


NON-SHORTING
SCHEMATIC

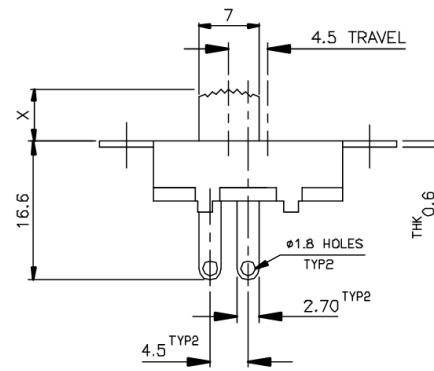


X=

MARKING:

SIDE A: **KSD** 250V
AC 125V 4A
SIDE B: U4
AC 250V 2A



ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P2T
	RATING: AC 125V 4A 250V 2A	MODEL NO: U4SS-12J19-G
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 300±100g	
	SWITCHING LIFE: 10000 Cycles (6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		940412-01