





# KSD

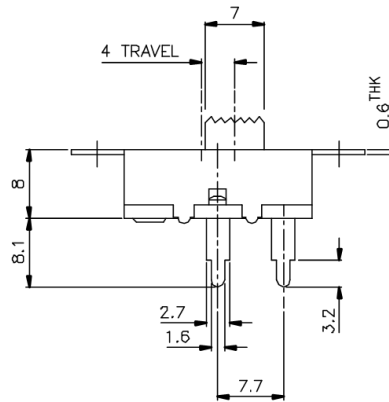

NON-SHORTING  
SCHEMATIC

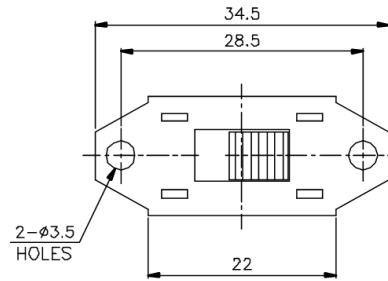

X=

MARKING: SIDE A: **KSD**

SIDE B: U11 AC 125V 11A  
AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P1T		
	RATING: AC 125V 11A AC 250V 5.5A	MODEL NO: U11SS-11P03-G(A)		
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m	m	DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1	CHK'D	
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20	APPD.	
	OPERATION FORCE: 400 ± 200 gm			
	SWITCHING LIFE: 10,000 Cycles(6-10c/m loading)			
BY:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:		
DATE:		960529-02		