





KSD

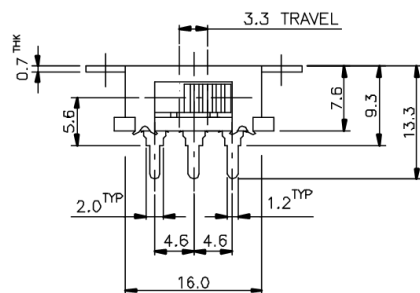

NON-SHORTING
SCHEMATIC

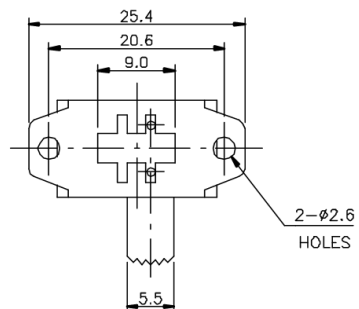

MARKING:

SIDE A: KSD U.S.

SIDE B: U4 AC 125V 4A
AC 250V 2A

X=

WITH U4, UL & C-UL LOGO

| | | | | |
|--------|---|-----------------|-------------------|--|
| ISSUED | SPECIFICATION (INITIAL) | TITLE: | SLIDE SWITCH 2P2T | |
| | RATING: AC 125V 4A | MODEL NO: | U4SK-22F15-G | |
| | CONTACT RESISTANCE: Not more than 30mΩ | UNIT: mm | DWN | |
| | INSULATION RESISTANCE: 500MΩ at 500V DC | SCALE: 2 : 1 | CHK'D | |
| | WITHSTAND VOLTAGE: AC 1000V for 1 min | TOLERANCE: ±0.2 | APPD. | |
| | OPERATION FORCE: 300±200g | | | |
| | SWITCHING LIFE: 10,000 Cycles(6-10c/m loading) | | | |
| BY: | 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD. | DRWG NO: | 991303-01 | |
| DATE: | | | | |