


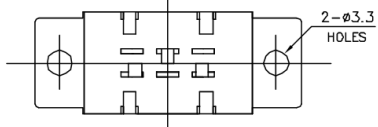



KSD

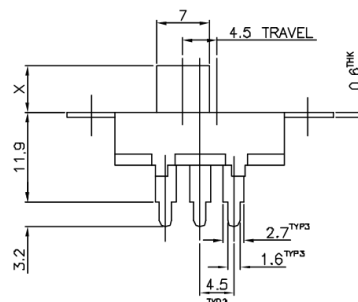

SCHMATIC

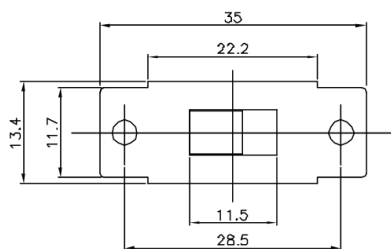

MARKING:

1. SIDE A **KSD** **U4**
2. SIDE B : U4 AC 125V 4A
AC 250V 2A
3. DATE CODE

X	X	Month (1.2.3? 9.X.Y.Z)
X	X	Year (1.2.3?)

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P2T			
	RATING: AC 125V 4A 250V 2A	MODEL NO: U4SS-12J15-G(B)-X			
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m DWN	Q F L	18.07.06	
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1	CHK'D		
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.2	APPD.		
	OPERATION FORCE: 300±100g				
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)				
BY:	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO: A60435-00			
DATE:					