





KSD

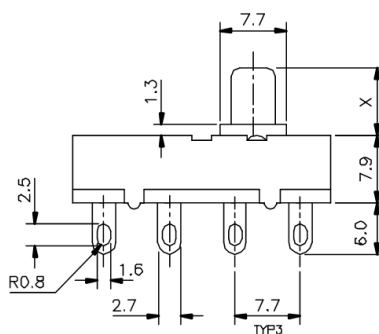


NON-SHORTING
SCHEMATIC



MARKING: SIDE A: **KSD** 科斯达

SIDE B: U11 AC 125V 11A
AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH	
	RATING: AC 125V 11A ; 250V 5.5A	MODEL NO:	U11SS-13L02-T(E)
	CONTACT RESISTANCE: MAX 30mΩ	UNIT: mm	DWN
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE: ±0.2	APPD.
	OPERATION FORCE: 400±200g		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)		
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	980404-01
DATE:			