


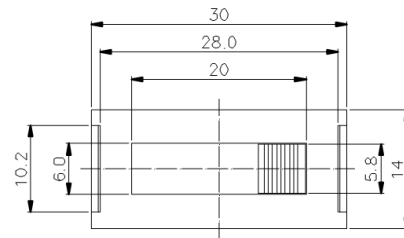



KSD



NON-SHORTING
SCHEMATIC




A DETAIL
SCALE 4:1

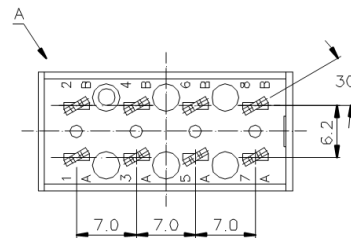

MARKING:

U16SS **KSD** 
10(1)A 250V~T85μ

ISSUED	SPECIFICATION (INITIAL)	TITLE:	SLIDE SWITCH 2P3T
	RATING: 10(1)A 250V~	MODEL NO.:	U16SS-23N02-G(A)
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT:	m m DWN
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE:	2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE:	±0.20 APPD.
	OPERATION FORCE: 500±200 g		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)		
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO.:	A20353-00
DATE:			