


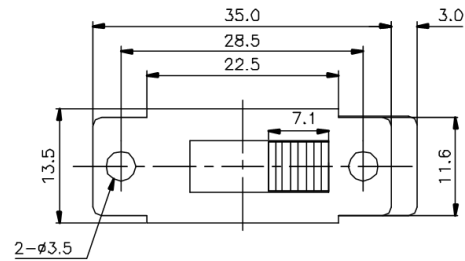

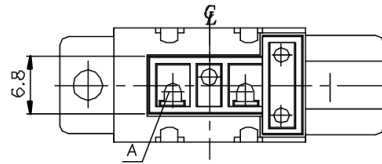


KSD



NON-SHORING
SCHEMATIC

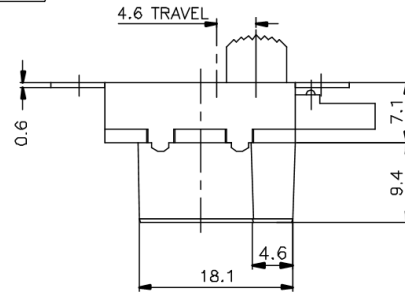

X=

NOTES: 1. ALL FIVE SPRING TERMINAL GAPS SHOULD ACCEPT


WITHOUT FORCE A 0.254mm PIN GAUGE AND NOT

ACCEPT A 0.7mm GAUGE PIN.

2. FOR 16 OR 20 AWG..STRIPPED & TINNED STACKPOLE.

MARKING: SIDE A: **KSD** 广东科斯达

SIDE B: U4 AC 125V 4A
AC 250V 2A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P3T
	RATING: AC 125V 4A AC 250V 2A	MODEL NO: U4SS-13J02-G
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m m DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: 1000V AC AT 1MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 400 ±250g	
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		960330-00