





KSD

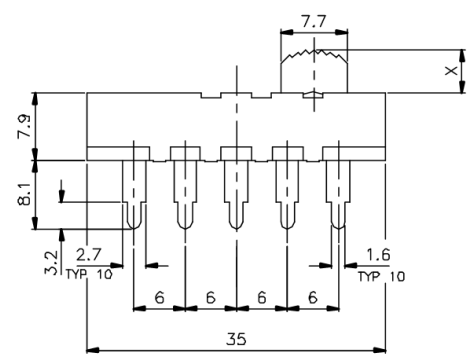

(NON-SHORTING)
SCHEMATIC

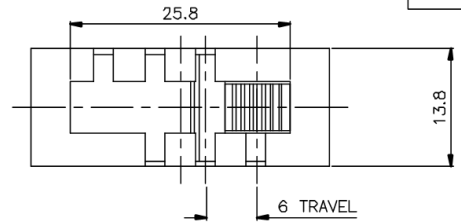

X =

MARKING:

SIDE A: **KSD** 标志
AC 125V 11A
SIDE B: U11
AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO: U11SS-24L03-G
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m m DWN
	INSULATION RESISTANCE: 500M ΩHM at 500V DC	SCALE: 2 : 1 CHK'd
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 400±150g	
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	
BY:	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		950377-02