





KSD

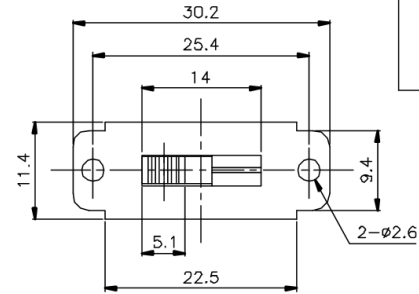

SCHEMATIC
SHORTING TYPE

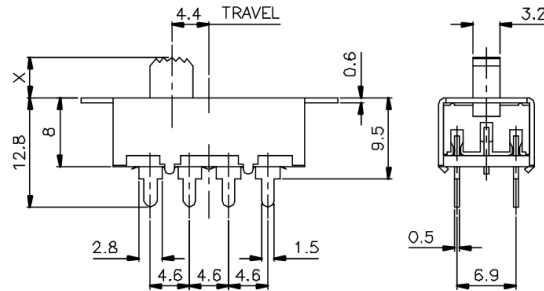

X =

| | | |
|--------|---|--------------------------|
| ISSUED | SPECIFICATION (INITIAL) | TITLE: SLIDE SWITCH 2P3T |
| | RATING: 3A 6A 125V 250V AC | MODEL NO: SS-23101-G |
| | CONTACT RESISTANCE: Not more than 30mΩ(initial) | UNIT: m m DWN |
| | INSULATION RESISTANCE: 500MΩ AT 500V DC | SCALE: 2 : 1 CHK'D |
| | WITHSTAND VOLTAGE: AC 500V FOR 1 MIN | TOLERANCE: ±0.2 APPD. |
| | OPERATION FORCE: 275 ± 175g | |
| | SWITCHING LIFE: 10000 Cycles(6-10c/m loading) | |
| BY: |  广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD. | DRWG NO: |
| DATE: | | 820135 |