
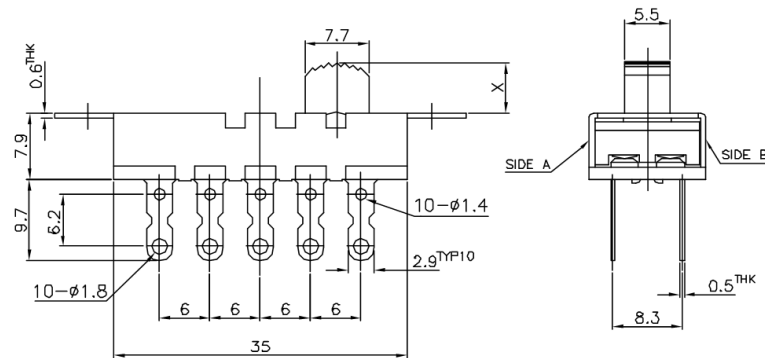
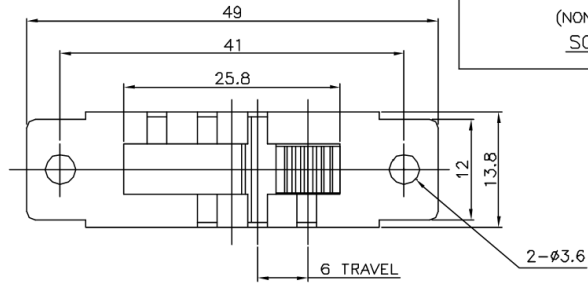



# KSD



MARKING:  
SIDE A: **KSD**   
SIDE B: U11 AC 125V 11A  
AC 250V 5.5A

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO: U11SS-24L05-G-00
	CONTACT RESISTANCE: Not more than 30m $\Omega$	UNIT: m m DWN Q F L 02.08.06
	INSULATION RESISTANCE: 500M $\Omega$ at 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: $\pm$ 0.20 APPD.
	OPERATION FORCE: 400 $\pm$ 150g	
	SWITCHING LIFE: 100000 Cycles(6-10c/m loading)	
BY:	 <b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		A60515-00