


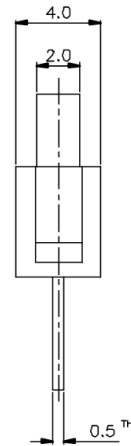


# KSD

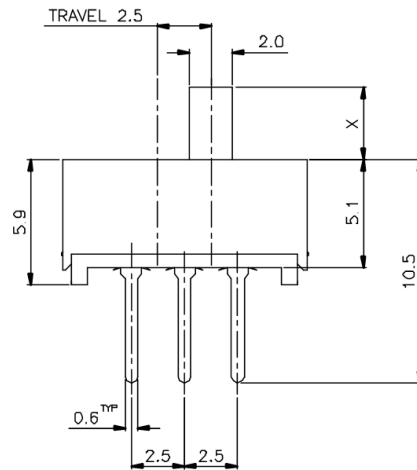

SCHEMATIC



X=

NOTE:  
SOLDER TEMPERATURE  
NOT TO EXCEED 230°C  
5 SEC (MAX)

ISSUED	SPECIFICATION (INITIAL)	TITLE:	SLIDE SWITCH	1P2T
	RATING: DC 50V 0.5A	MODEL NO:	SS-12E01-G(B)	
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT:	m	m
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE:	5 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 500V for 1 min	TOLERANCE:	±D 2	APPD.
	OPERATION FORCE: 200±150g			
	SWITCHING LIFE: 10000cycles(6-10c/m loading)			
BY:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	820010-01	
DATE:				