






KSD

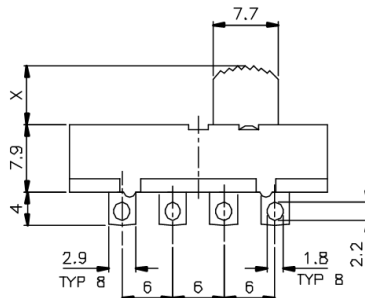


Non-shorting
SCHEMATIC



MARKING: SIDE A: **KSD** 
 SIDE B: U11 AC 125V 11A
 AC 250V 5.5A

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH
	RATING: 11A 125VAC 5.5A 250VAC	MODEL NO: U11SS-23L10-G
	CONTACT RESISTANCE: MAX 30mΩ	UNIT: m m DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 400±150g	
	SWITCHING LIFE: 10000 Cycles (6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		980042-02