
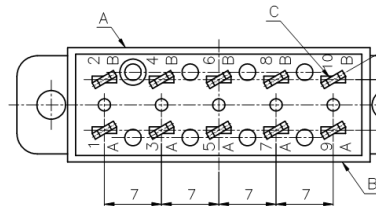

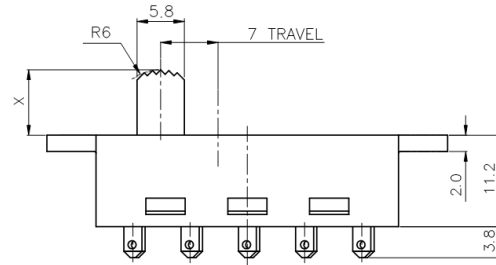



# KSD

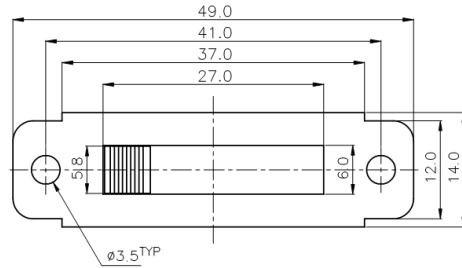

X =

MARKING:  
 SIDE A: U16SS **KSD**   
 10(1)A 250V~T85μ   
 SIDE B: U16SS AC 125V 16A

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH 2P4T		
	RATING: AC 125V 16A : 10(1)A 250V ~ CONTACT RESISTANCE: Not more than 30mΩ INSULATION RESISTANCE: 500MΩ at 500V DC WITHSTAND VOLTAGE: AC 1000V for 1 min OPERATION FORCE: 600 ± 200g SWITCHING LIFE: 10,000 Cycles(6-10c/m loading)	MODEL NO: U16SS-24N04-G	UNIT: m m	DWN PJY 2010.01.06
		SCALE: 2 : 1	CHK'D	
		TOLERANCE: ±0.20	APPD.	
BY: DATE:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO: AA0019-00	REV: A	