





KSD

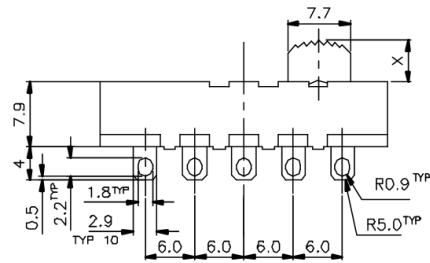

NON-SHORTING
SCHEMATIC

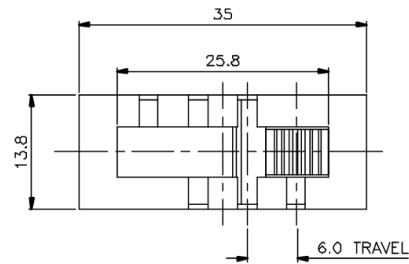

MARKING:

SIDE A: **KSD** 司达

SIDE B: U11 AC 125V 11A
AC 250V 5.5A

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T			
	RATING: AC 125V 11A 250V 5.5A	MODEL NO: U11SS-24L04-G			
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m	m	DWN	
	INSULATION RESISTANCE: 500M OHM at 500V DC	SCALE: 2 : 1	CHK'D		
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20	APPD.		
	OPERATION FORCE: 400±200g	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)			
BY:	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:			
DATE:		A20702-01			