





# KSD

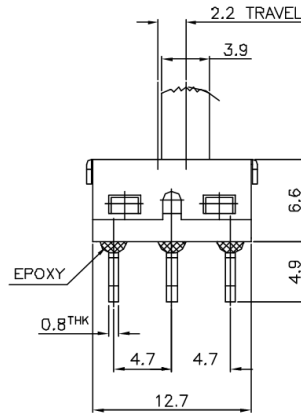

NON-SHORTING  
SCHEMATIC




MARKING:

SIDE A: U4SS AC 125V 4A  
AC 250V 2A

SIDE B: **KSD** 广东科斯达

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE:	SLIDE SWITCH 1P2T		
	RATING: AC125V 4A 250V 2A	MODEL NO:	U4SS-12D02-G-Y-01		
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT:	m m	DWN	Q F L 10.05.06
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE:	3 : 1	CHK'D	
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE:	±0.2	APPD.	
	OPERATION FORCE: 250±100g				
	SWITCHING LIFE: 10000cycles(6-10c/m loading)				
BY:	 <b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	A60271-00		
DATE:					