





# KSD

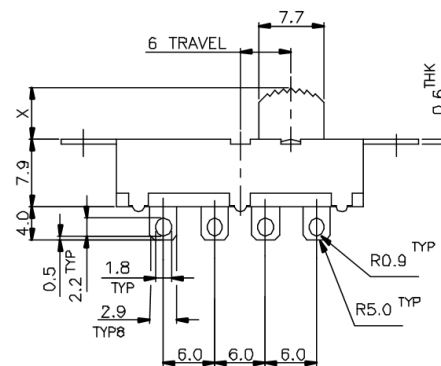


NON-SHORTING  
SCHEMATIC

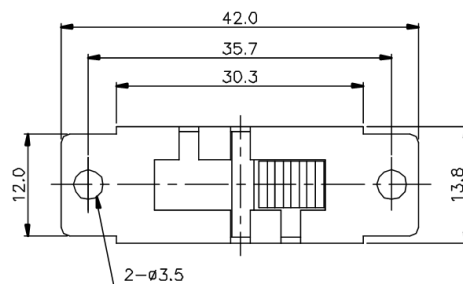

X=

MARKING:

SIDE A: **KSD** 930093  
 SIDE B: U11 AC 125V 11A  
 AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO: U11SS-23L02-G
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m DWN
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 400±150g	
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	
BY:	 <b>广东科斯达电子科技有限公司</b>	DRWG NO:
DATE:	<b>GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.</b>	930093-05