





KSD

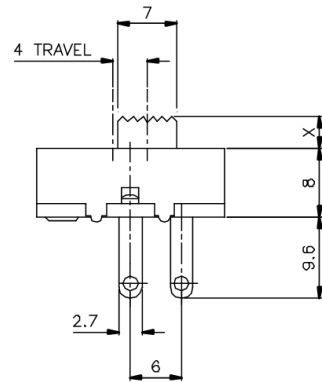

NON-SHORTING
SCHEMATIC



X=

MARKING: SIDE A: **KSD**
SIDE B: U13 AC 125V 13A
AC 250V 6.5A

| | | |
|--------|---|----------------------------|
| ISSUED | SPECIFICATION (INITIAL) | TITLE: SLIDE SWITCH 1P1T |
| | RATING: AC 125V 13A AC 250V 6.5A | MODEL NO: U13SS-11L02-G(A) |
| | CONTACT RESISTANCE: MAX. 30mΩ | UNIT: m m DWN |
| | INSULATION RESISTANCE: 500MΩ at 500V DC | SCALE: 2 : 1 CHK'D |
| | WITHSTAND VOLTAGE: AC 1000V for 1 min | TOLERANCE: ±0.20 APPD. |
| | OPERATION FORCE: 400 ± 200 g | |
| | SWITCHING LIFE: 10000 Cycles(6-10c/m loading) | |
| BY: | 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD. | DRWG NO: |
| DATE: | | 990002-01 |