


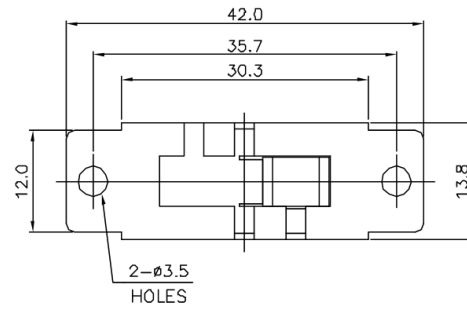


KSD



NON-SHORTING
SCHEMATIC

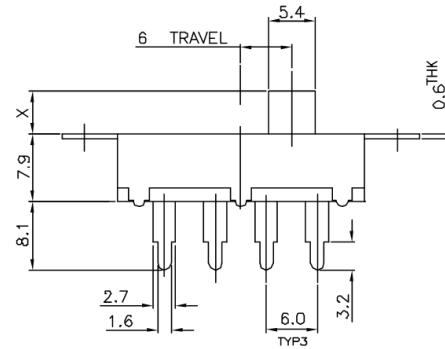

MARKING:


1. SIDE A: **KSD**  **US**

2. SIDE B: U11 AC 125V 11A
AC 250V 5.5A

3. DATE CODE

X X Month (1.2.3? 9.X.Y.Z)
Year (1.2.3?)

X=

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH 2P3T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO: U11SS-23L11-G(B)-X-00
	CONTACT RESISTANCE: MAX. 30mΩ (INITIAL)	UNIT: m m DWN Q F L 29.04.06
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 400 ± 200 g	
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		A60261-00