






KSD

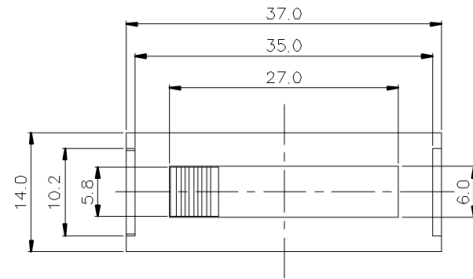

NON-SHORTING
SCHEMATIC



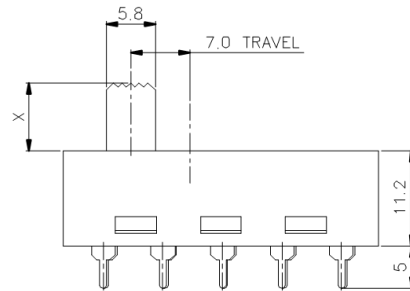

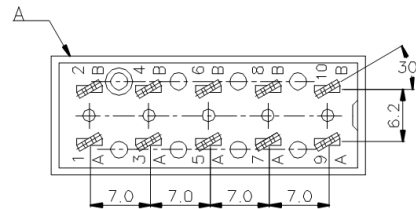A DETAIL
SCALE 4:1



MARKING:

U16SS **KSD** 
10(1)A 250V ~ T85μ

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T
	RATING: 10(1)A 250V ~	MODEL NO: U16SS-24N02-G(A)
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT:  DWN
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE: ±0.20 APPD.
	OPERATION FORCE: 600 ± 200g	
	SWITCHING LIFE: 10,000 Cycles(6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		A20289-00