

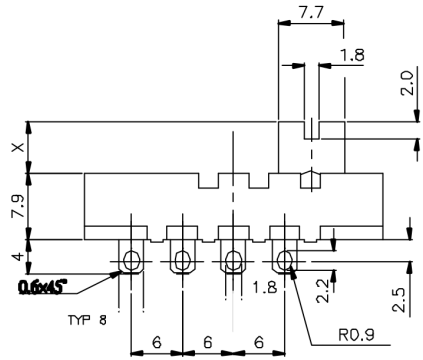
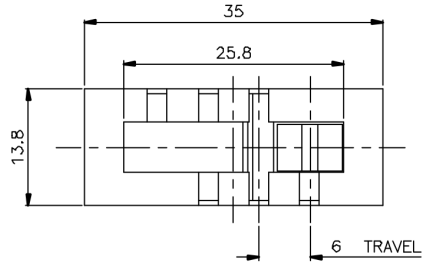


**KSD**



X =

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T	
	RATING: 3A 6A 125V 250V AC	MODEL NO: SS-24L07-G(C)	
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m	m DWN
	INSULATION RESISTANCE: 500M ΩHM at 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 500V FOR 1 MIN	TOLERANCE: ±0.20	APPD.
	OPERATION FORCE: 400±200g		
	SWITCHING LIFE: 10,000 Cycles(6-10c/m loading)		
BY:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	
DATE:		990058-02	