


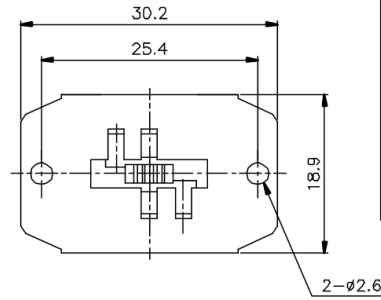



KSD

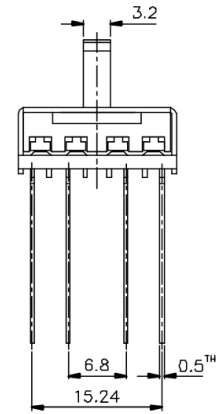

NON-SHORTING SCHEMATIC

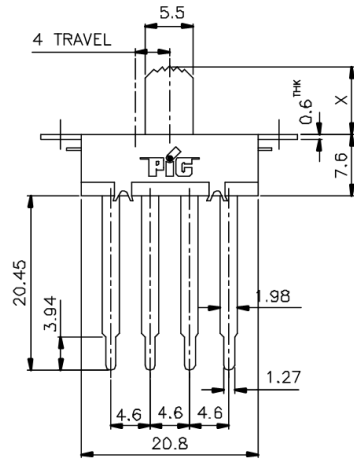

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE:	SLIDE SWITCH 4P3T
	RATING: DC 125V 3A	MODEL NO:	WS-4.3HQ8-C
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT:	m m DWN
	INSULATION RESISTANCE: 500mΩ at 500V DC	SCALE:	2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 500V for 1 min	TOLERANCE:	±0.2 APPD.
	OPERATION FORCE: 400±200 g		
	SWITCHING LIFE: 10000 cycles(6-10c/m loading)		
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	991315-03
DATE:			