





KSD

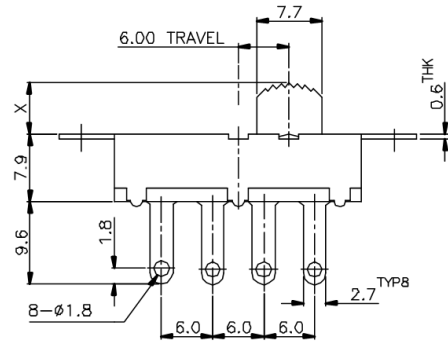

NON-SHORTING
SCHEMATIC

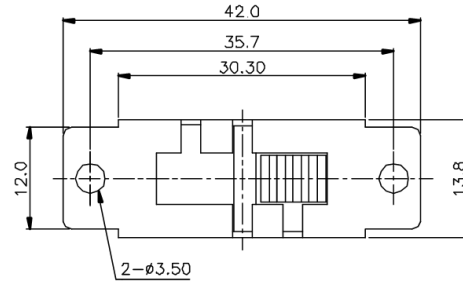

MARKING:

SIDE A: **KSD**

AC 125V 11A

X=

SIDE B: U11

AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH	2P3T
	RATING: AC 125V 11A 250V 5.5A	MODEL NO:	U11SS-23L03-G
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m DWN	
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE: ±0.20	APPD.
	OPERATION FORCE: 400 ± 150 g		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)		
BY:	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	930180-04
DATE:			