






KSD




NON-SHORTING
SCHEMATIC



SUGGESTED PC BOARD LAYOUT

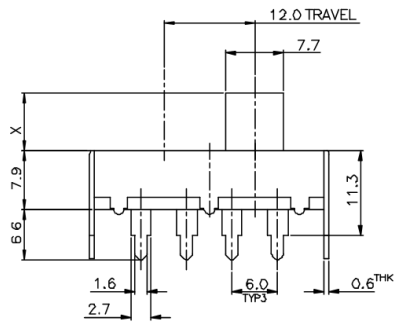

X=

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH 2P2T			
	RATING: AC 125V 4A	MODEL NO: WS-22L24-G(B)			
	CONTACT RESISTANCE: MAX. 30mΩ (INITIAL)	UNIT: m	m	DWN	Q F L
	INSULATION RESISTANCE: 500MΩ AT 50V DC				29.07.06
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN.	SCALE: 2 : 1	CHK'D		
	OPERATION FORCE: Max 300g	TOLERANCE: ±0.20	APPD.		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)				
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:			
DATE:		A60091-01			