





**KSD**



SCHEMATIC

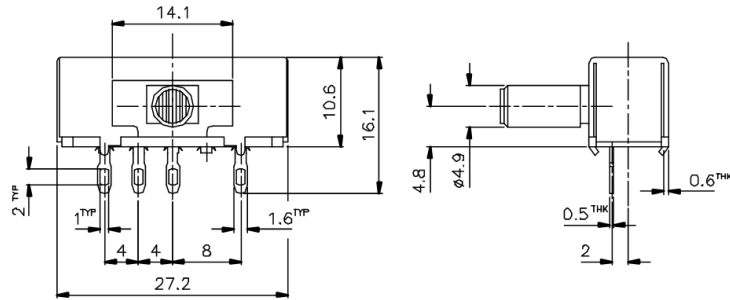

X=

|        |   |                          |       |
|--------|---|--------------------------|-------|
| ISSUED | SPECIFICATION (INITIAL)   | TITLE: SLIDE SWITCH 1P3T |       |
|        | RATING: DC 50V 0.5A   | MODEL NO: SK-13H04-T     |       |
|        | CONTACT RESISTANCE: Not more than 30mΩ  | UNIT: mm                 | DWN   |
|        | INSULATION RESISTANCE: 500MΩ at 500V DC   | SCALE: 2 : 1             | CHK'D |
|        | WITHSTAND VOLTAGE: AC 500V for 1 min  | TOLERANCE: ±0.2          | APPD. |
|        | OPERATION FORCE: 350±100g   |                          |       |
|        | SWITCHING LIFE: 10000cycles(6-10c/m loading)  |                          |       |
| BY:    |  <b>广东科斯达电子科技有限公司</b><br>GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD. | DRWG NO:                 |       |
| DATE:  |   | B800705-00               |       |