






KSD



NON-SHORTING SCHEMATIC

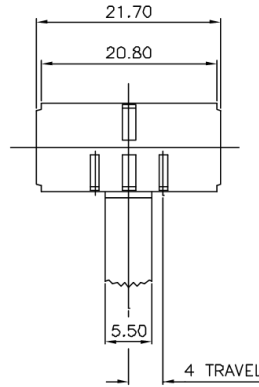

X=4~16

ISSUED	SPECIFICATION (INITIAL)	TITLE:	SLIDE SWITCH 2P3T			
	RATING: DC 50V 0.5A	MODEL NO:	SK-23H09-G			
	CONTACT RESISTANCE: MAX. 30mΩ (INITIAL)	UNIT:	m	m	DWN	Q F L 28.06.06
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE:	2	:	1	CHK'D
	WITHSTAND VOLTAGE: AC 500V FOR 1 MIN	TOLERANCE:	±0.20			
	OPERATION FORCE: 300 ± 100 g	APPD.				
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	DRWG NO:	810078-05			
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.					
DATE:						