




NORMAL OPEN (NO)

SCHEMATIC

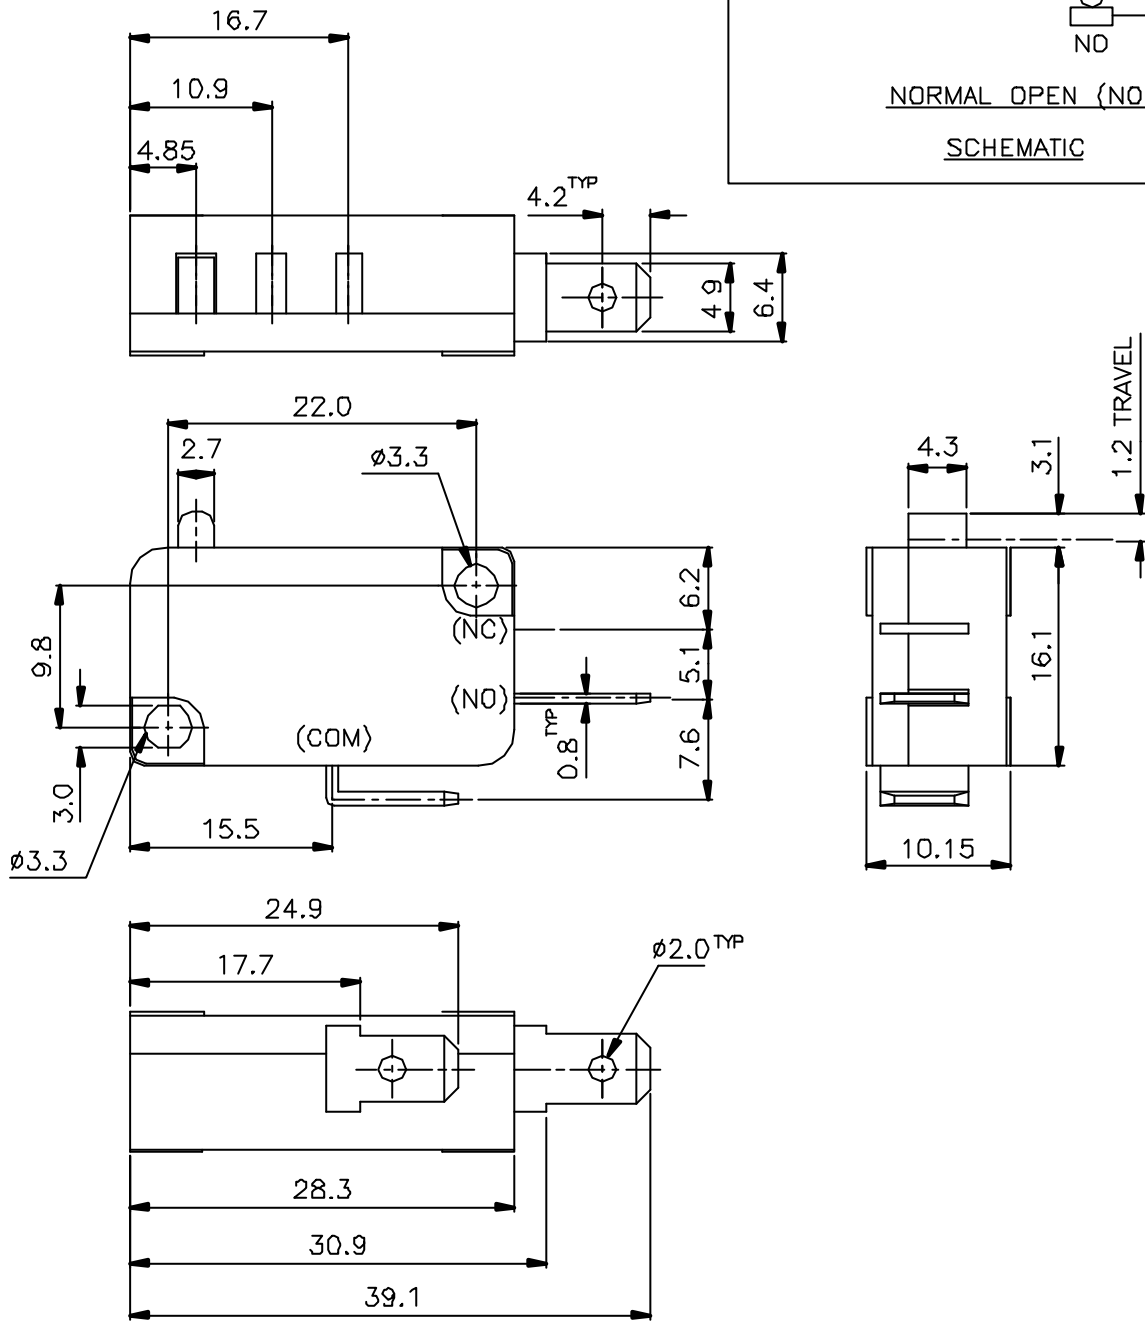

WITH U16WX-76 c  16A 125V AC 15A 24V DC LOGO

ISSUED	SPECIFICATION (INITIAL)	TITLE: MICRO SWITCH 1P1T		
	RATING: AC 125V 16A DC 24V 15A	MODEL NO: WX-76 B		
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: mm	DWN	
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2 : 1	CHK'D	
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE: ±0.2	APPD.	
	OPERATION FORCE: 300±150g			
	SWITCHING LIFE: 10000cycles(6-10c/m loading)			
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:		
DATE:		991261-04		