







Rating: 100mA 30VDC ;
 Contact Resistance: 100mΩ Max. ;
 Insulation Resistance: DC 500V 100MΩ Min. ;
 Dielectric Strength: AC 250V 1 minute
 Total Travel: 2.5±0.5mm
 Operating Force: 200±100gf
 Mechanical Life: Over 50,000 cycles
 Electrical Life: Over 10,000 cycles
 Operating Temperature: -20°C~70°C
 Soldering Temperature: 256°C for 5 Seconds

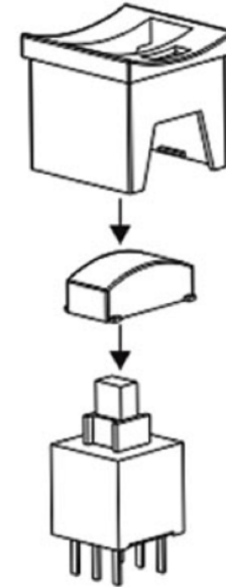


Contact Configuration

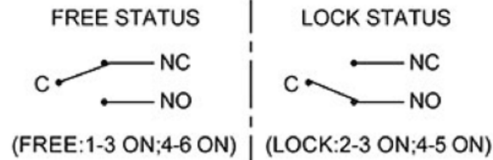

MATERIAL:
 Outer Frame: ABS;
 Base: ABS ;
 Actuator: ABS
 Terminal: Brass, Silver or Tin plated . **BOTTOM VIEW**



PANEL HOLE



PCB HOLE (BOTTOM VIEW)

				广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		DRAWN BY: Jack Lu CHECKED BY: Jacky Chen APPROVED BY: Tony Kao	DATE 12/27/22 DATE 12/27/22 DATE 12/27/22	MAT'L FINISH SCALE SHEET NO.	TITLE MODLE DWG NO. PART NO.	SWITCH TACT SWITCH WITH LED	SIZE A4 VER R
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2 Above 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5 Angle ±0.3		3RD. ANGEL'S	UNITS MM	1 : 1	1 of 1		