



Specifications

Circuit	:SPST
Current rating	:30mA
Voltage rating	:30VDC
Dielectric withstanding voltage	:500VAC for 1 minute
Contact resistance	:30m Ω Max. (Initial)
Insulation resistance	:100M Ω Min
Operating force	:300 \pm 50gf
Total travel	:0.7mm \pm 0.2mm
Operating life	:100,000 cycles Min.
Solder specifications	:260 \pm 5 $^{\circ}$ C for 5 seconds
Operating temperature	:-20 $^{\circ}$ C ~ +60 $^{\circ}$ C
Welding method	:Manual Soldering (350 $^{\circ}$ C \pm 5 $^{\circ}$ C, 3s \pm 0.5s)

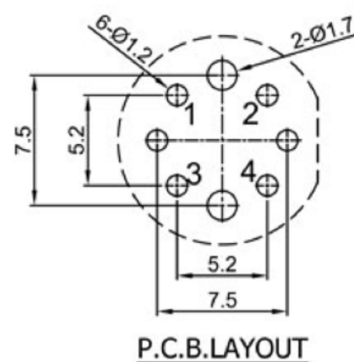

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle ± 0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	12/27/22			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH WITH LED
Jacky Chen	12/27/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/27/22	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R

ITEM NO.	DESCRIPTION	DRAWN	DATE