







Rating: 100mA 30VDC ;  
 Contact Resistance: 100m Ω Max. ;  
 Insulation Resistance:DC 500V 100M Ω Min. ;  
 Dielectric Strength:AC 250V 1 minute  
 Total Travel: 2.5±0.5mm  
 Operating Force:200± 100gf  
 Mechanical Life: Over 50,000 cycles  
 Electrical Life: Over 10,000 cycles  
 Operating Temperature:-20°C~70°C  
 Soldering Temperature:256°C for 5 Seconds




**Contact Configuration**

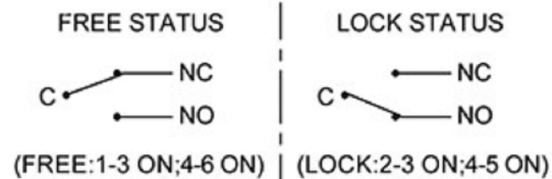

**MATERIAL:**  
 Outer Frame:ABS;  
 Base:ABS ;  
 Actuator:ABS  
 Terminal: Brass,Silver or Tin plated . **BOTTOM VIEW**



**PANEL HOLE**



**PCB HOLE(BOTTOM VIEW)**



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	12/27/22	FINISH	MODLE	TACT SWITCH WITH LED
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	12/27/22	1 : 1		A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	12/27/22	1 of 1		R

ITEM NO.	DESCRIPTION	DRAWN	DATE