




Rating: Min. 0.5uA  
 Max. 250mA/120V/9W AC/6W DC  
 Contact Resistance: 100mΩ Max  
 Insulation Resistance: 10MΩ Min  
 Dielectric Strength: AC 1000V for 2 minute  
 Total travel: 1.8±0.4mm  
 Operating Force: 250±50gf  
 Mechanical Life: Over 500,000 cycles  
 Electrical Life: Over 100,000 cycles  
 Operating Temperature: -40°C~75°C  
 MATERIAL:

Base: LCP;  
 Actuator: LCP;  
 Terminal: Phosphor bronze, Gold plated.

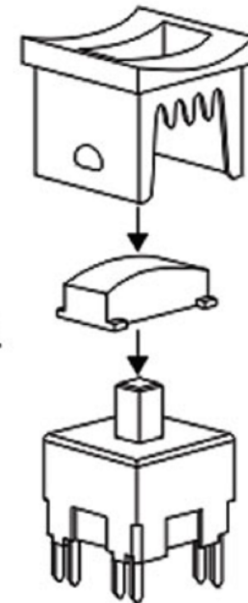

Temperature and duration of dipping:  
 Wave: Max 260°C for Max 10 seconds. Circuit Diagram  
 270°C for Max 5 seconds.  
 Soldering iron: Max 350°C for Max 3 seconds.

广东科斯达电子科技有限公司  
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

|              |          |           |          |                      |
|--------------|----------|-----------|----------|----------------------|
| DRAWN BY:    | DATE     | MATL      | TITLE    | SWITCH               |
| Jack Lu      | 12/27/22 |           |          |                      |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | TACT SWITCH WITH LED |
| Jacky Chen   | 12/27/22 |           |          |                      |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | SIZE                 |
| Tony Kao     | 12/27/22 | 1 : 1     |          | A4                   |
|              |          | SHEET NO. | PART NO. | VER                  |
|              |          | 1 of 1    |          | R                    |

|          |             |       |      |
|----------|-------------|-------|------|
| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|          |             |       |      |