


Rating: 0.2A 36VDC  
 Contact Resistance: 50mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Dielectric Strength: AC 500V 1 minute  
 Total travel: 1.8±0.3mm  
 Operating Force: 200±100gf  
 Mechanical Life: Over 30,000 cycles  
 Electrical Life: Over 10,000 cycles  
 Operating Temperature: -20°C~+85°C  
 Manual Welding: 350°C for 3 Seconds  
 Function: OFF - (ON)


**MATERIAL:**

Base: PA66, UL rated: 94 V-2 Min;  
 Cap: PC ;  
 Terminal: Copper, Golden plated ;

**CIRCUIT**

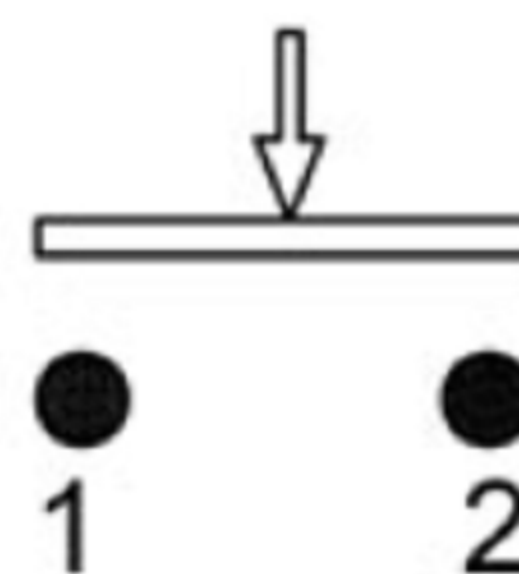

**CUT-OUT**

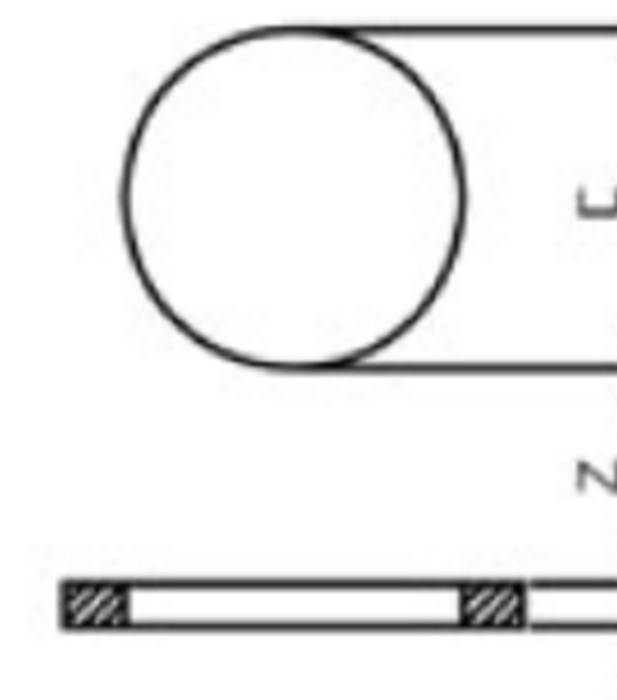

| Z       | D        |
|---------|----------|
| 0.8~1.0 | 8.0-8.1  |
| 1.0~1.7 | 8.1~8.25 |


**广东科斯达电子科技有限公司**  
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3  
 3RD. ANGEL'S  
 UNITS MM

|              |          |           |          |                      |
|--------------|----------|-----------|----------|----------------------|
| DRAWN BY:    | DATE     | MAT'L     | TITLE    | SWITCH               |
| Jack Lu      | 12/27/22 |           | MODLE    | TACT SWITCH WITH LED |
| CHECKED BY:  | DATE     | FINISH    | DWG NO.  | SIZE                 |
| Jacky Chen   | 12/27/22 |           |          | A4                   |
| APPROVED BY: | DATE     | SCALE     | PART NO. | VER                  |
| Tony Kao     | 12/27/22 | 1 : 1     |          | R                    |
|              |          | SHEET NO. | 1 of 1   |                      |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|------|
|          |             |       |      |