


Specifications:

Rating :1A 250VAC(TUV),3A 125VAC
 :0.3A 50VDC
 :4A 250VAC(TUV),8A 125VAC
 Contact Resistance :20mΩ max.(initial)
 Insulation Resistance :500VDC 100MΩ min.
 Dielectric voltage-withstand:1000VAC for 1 minute
 Operation force :600±200 gram
 Life cycle :6,000 cycles
 :50,000 cycles(0.3A 50VDC)
 Temperature Rang :-40°to +85°C
 Protection level: IP65

Base :PC
 Actuator:POM,optional color
 Cover :PC
 Contact :Silver
 Terminal: brass
 Washer :steel
 Nut :Steel
 Switching function:on-off,off-momentary on,or on-momentary off

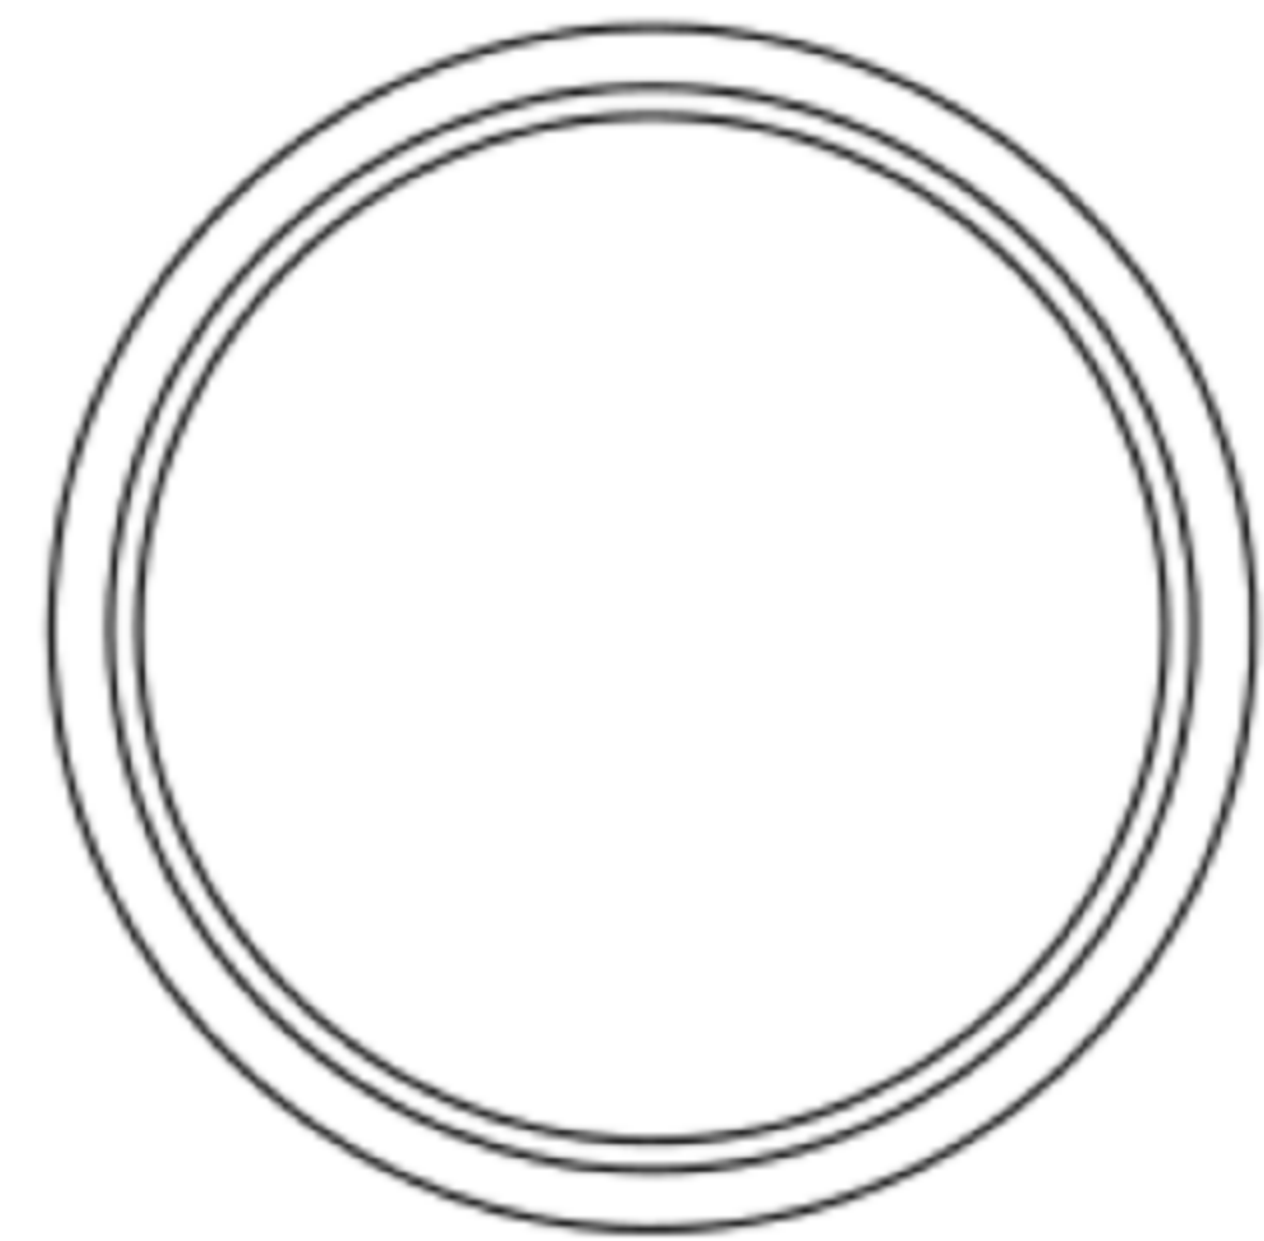

 **广东科斯达电子科技有限公司**
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH WITH LED
Jacky Chen	12/27/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/27/22	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R

ITEM NO.	DESCRIPTION	DRAWN	DATE