


SPECIFICATIONS

Total Travel: 0.8-1.0mm;
 Operating Force: 500-700gf;
 Degree of protection: IP67;
 Mechanical Life: 1000, 000 cycles;
 LED Life: 50, 000 hours;


Switch the material:

1. Shell material: Aluminium Alloy;
2. Key: PC;
3. Back shroud: PA66;
4. Supporting plate: POM;

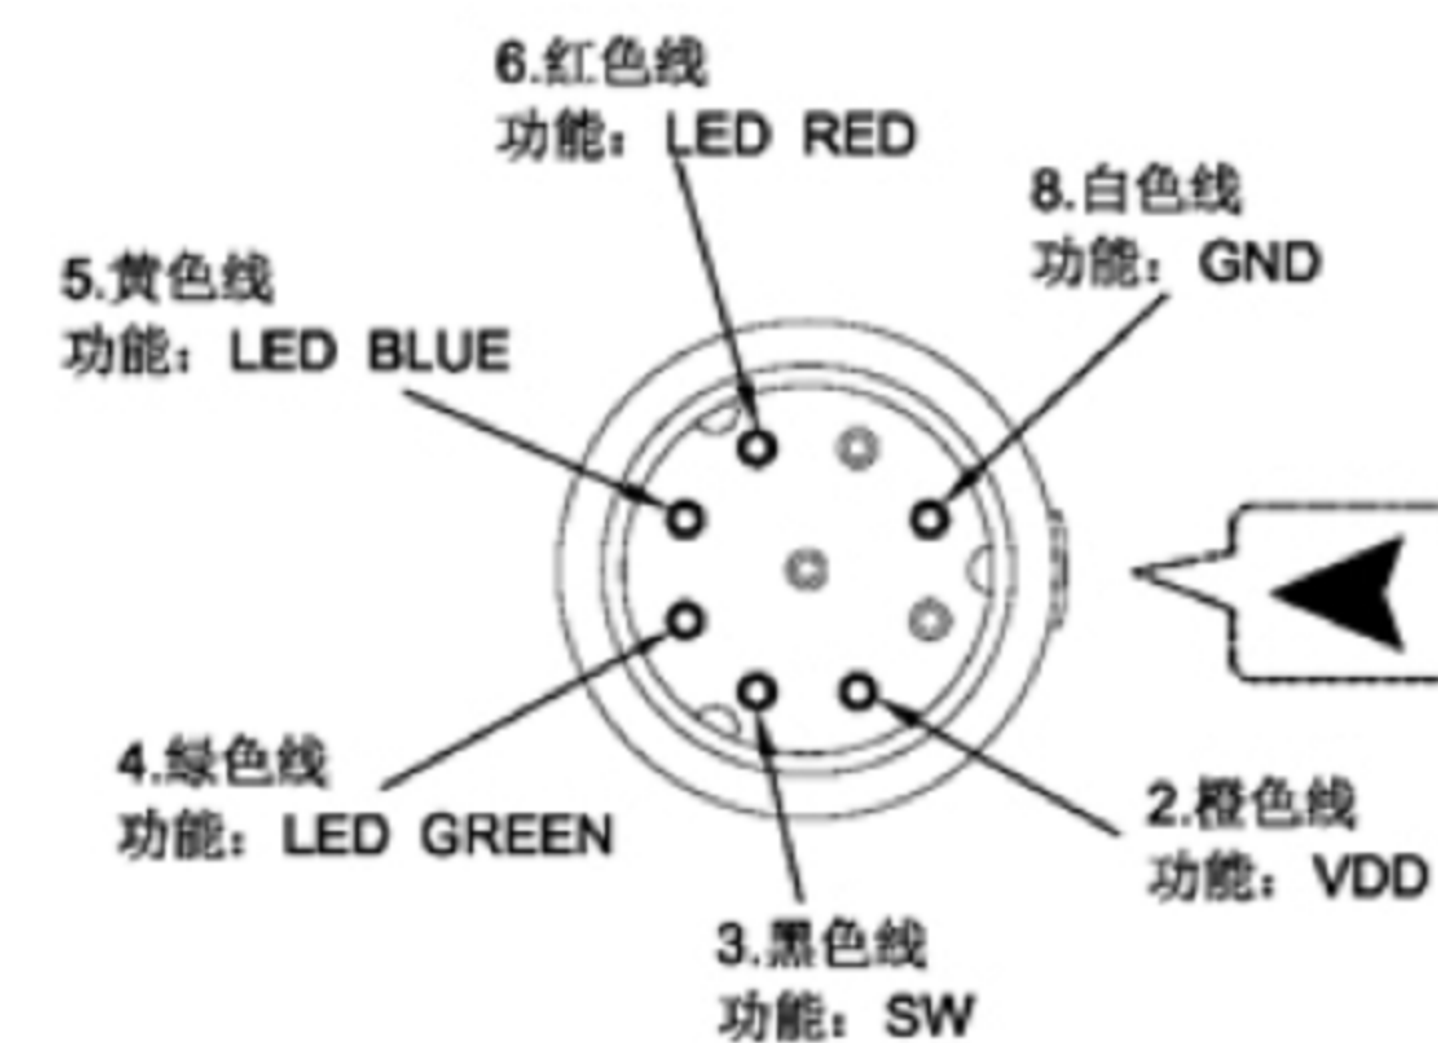

 **广东科斯达电子科技有限公司**
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S  UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH WITH LED
Jacky Chen	12/27/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/27/22	1:1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R