





PTM19

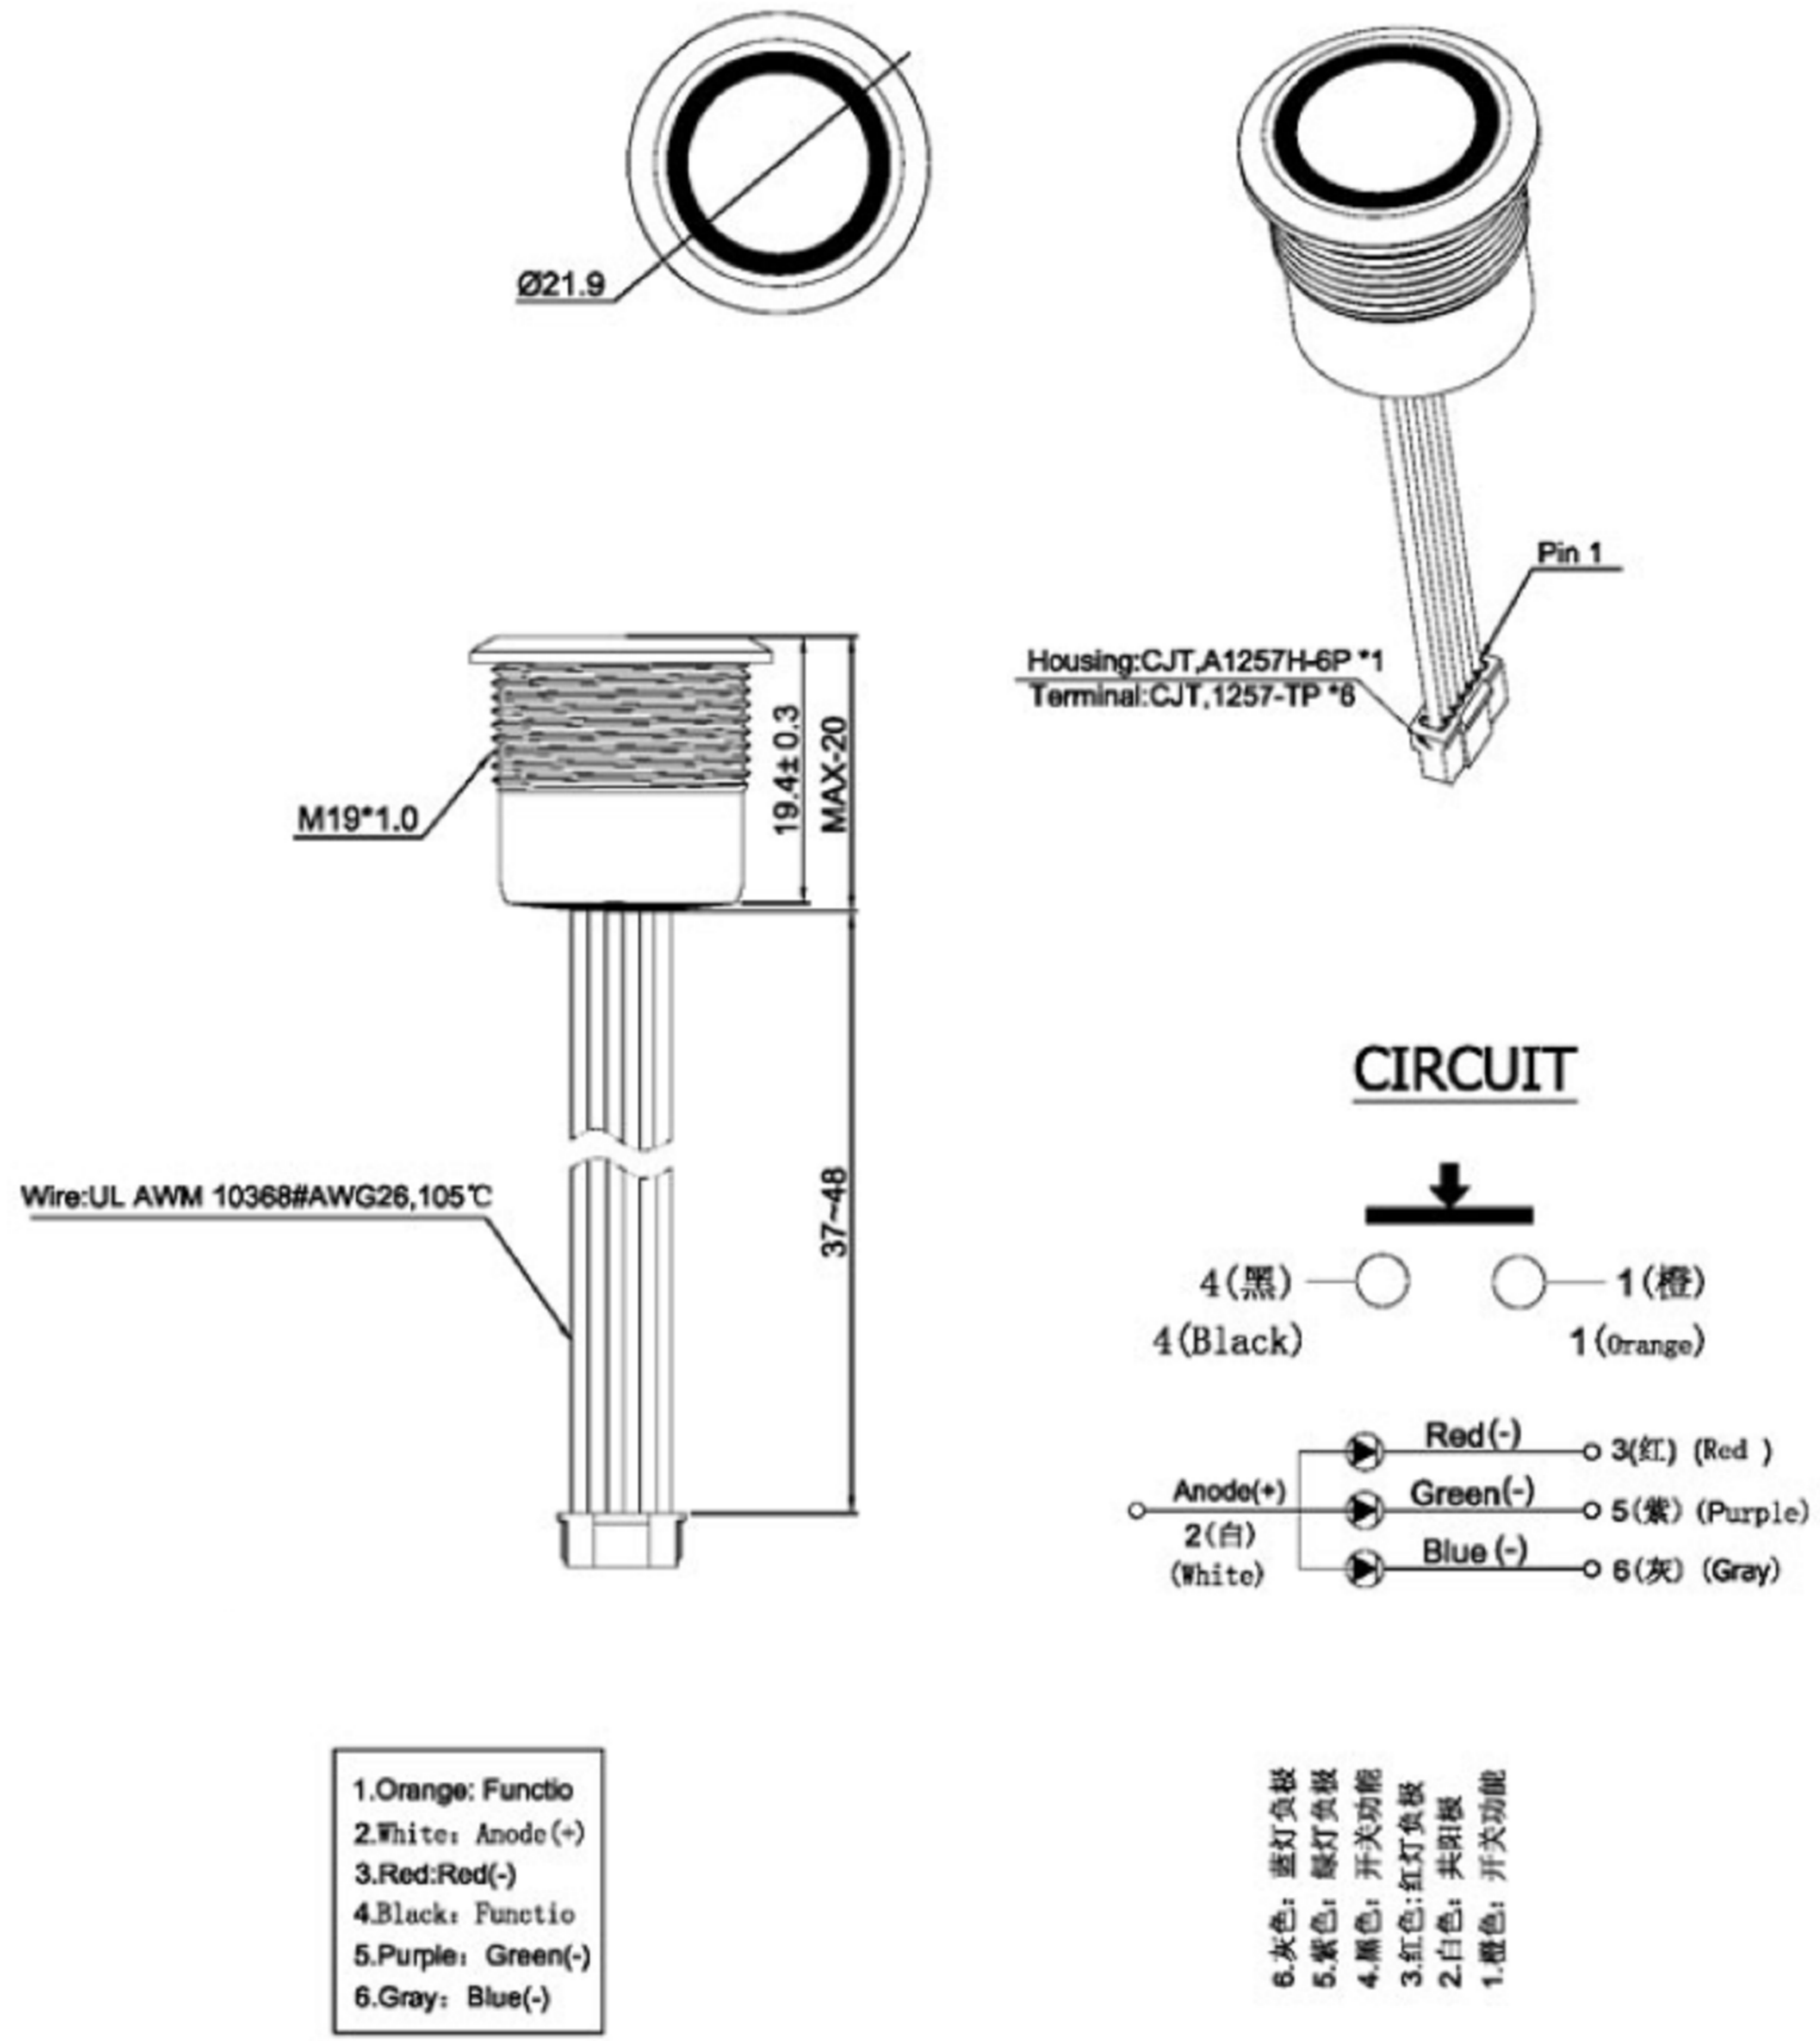

SPECIFICATIONS
 Rating: 1 to 50mA ;
 3 to 24VDC ;
 Degree of protction: IEC IP67;
 Contact Resistance: 100mΩ Max. ;
 Dielectric Strength: 250 VAC For 1 minute ;
 Insulation resistance: 100M Ω Min;
 Total Travel: 0.8~1.0 mm ;
 Operating Force: 600± 100gf ;
 Operating life: 100,000 cycles Min;
 LED Life: 50, 000 hours;
 LED Rating: 20mA Max;
 3 to 24VDC ;

Switch the material:
 1. Shell material: Aluminium Alloy;
 2. Key: PC;
 3. Back shroud: PA66;
 4. Supporting plate: POM;

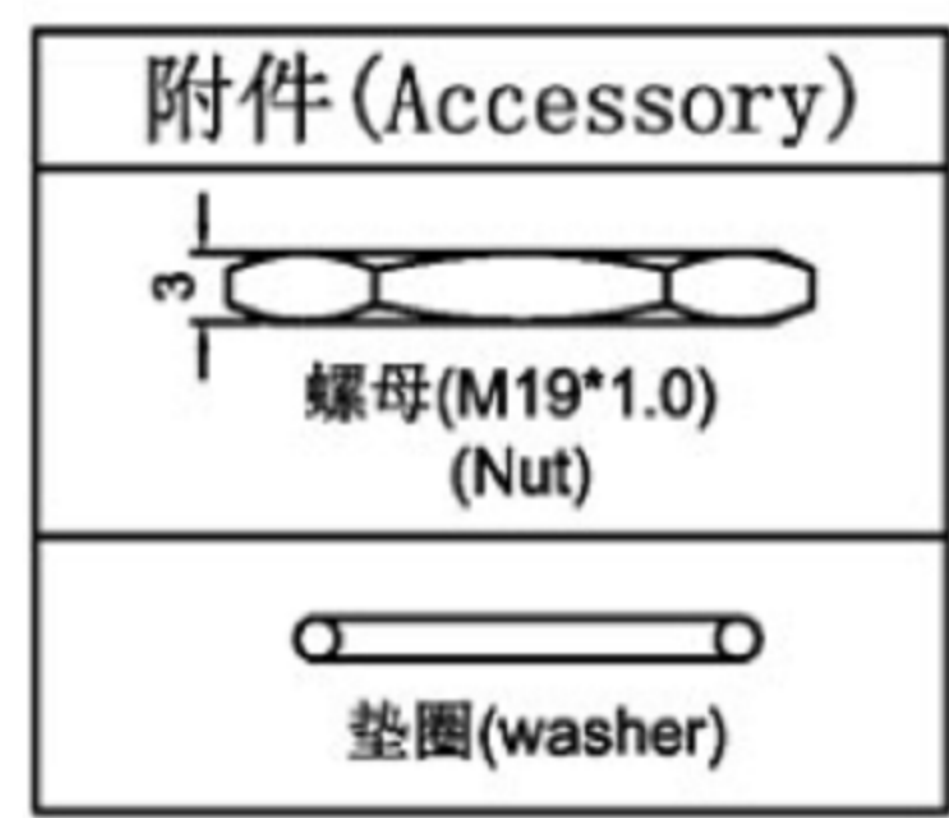

- 1. Orange: Functio
- 2. White: Anode (+)
- 3. Red: Red (-)
- 4. Black: Functio
- 5. Purple: Green (-)
- 6. Gray: Blue (-)

- 6.灰色: 蓝灯负极
- 5.紫色: 绿灯负极
- 4.黑色: 开关功能
- 3.红色: 红灯负极
- 2.白色: 共阳极
- 1.橙色: 开关功能

 **广东科斯达电子科技有限公司**
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3
 3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22		MODLE	TACT SWITCH WITH LED
CHECKED BY:	DATE	FINISH	DWG NO.	SIZE
Jacky Chen	12/27/22			A4
APPROVED BY:	DATE	SCALE	PART NO.	VER
Tony Kao	12/27/22	1 : 1		R
		SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE