




SPECIFICATIONS

Rating: 1 to 50mA ;
 3 to 24VDC ;
 Degree of protection: IEC IP67;
 Contact Resistance: 100mΩ Max. ;
 Dielectric Strength:250 VAC For 1 minute ;
 Insulation resistance:100M Ω Min;
 Total Travel: 0.8~1.0 mm ;
 Operating Force:600± 100gf ;
 Operating life: 100,000 cycles Min;
 LED Life: 50, 000 hours;
 LED Rating: 20mA Max;
 3 to 24VDC ;

Switch the material:

- 1.Shell material: Aluminium Alloy;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;

Wire color(线材颜色)	Function(功能)
1.Purple(紫色)	Blue(-)<蓝色负极>
2.Black(黑色)	Green(-)<绿色负极>
3.Green(绿色)	Function<开关功能>
4.Brown(棕色)	Red(-)<红色负极>
5.White(白色)	Anode(+)<共阳极>
6.Orange(橙色)	Function<开关功能>

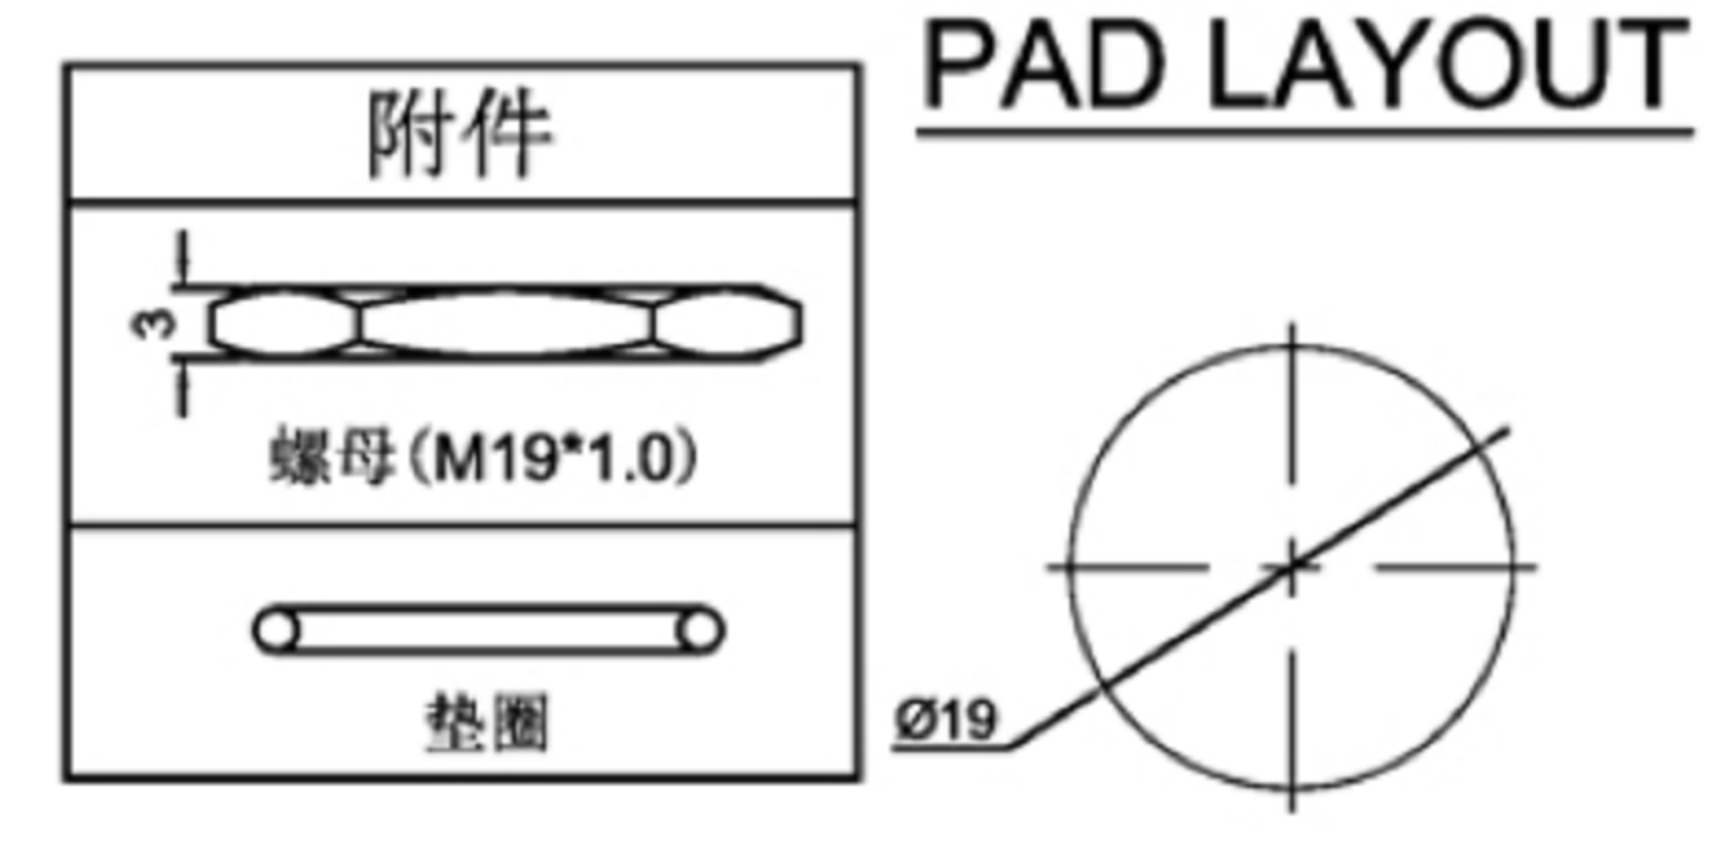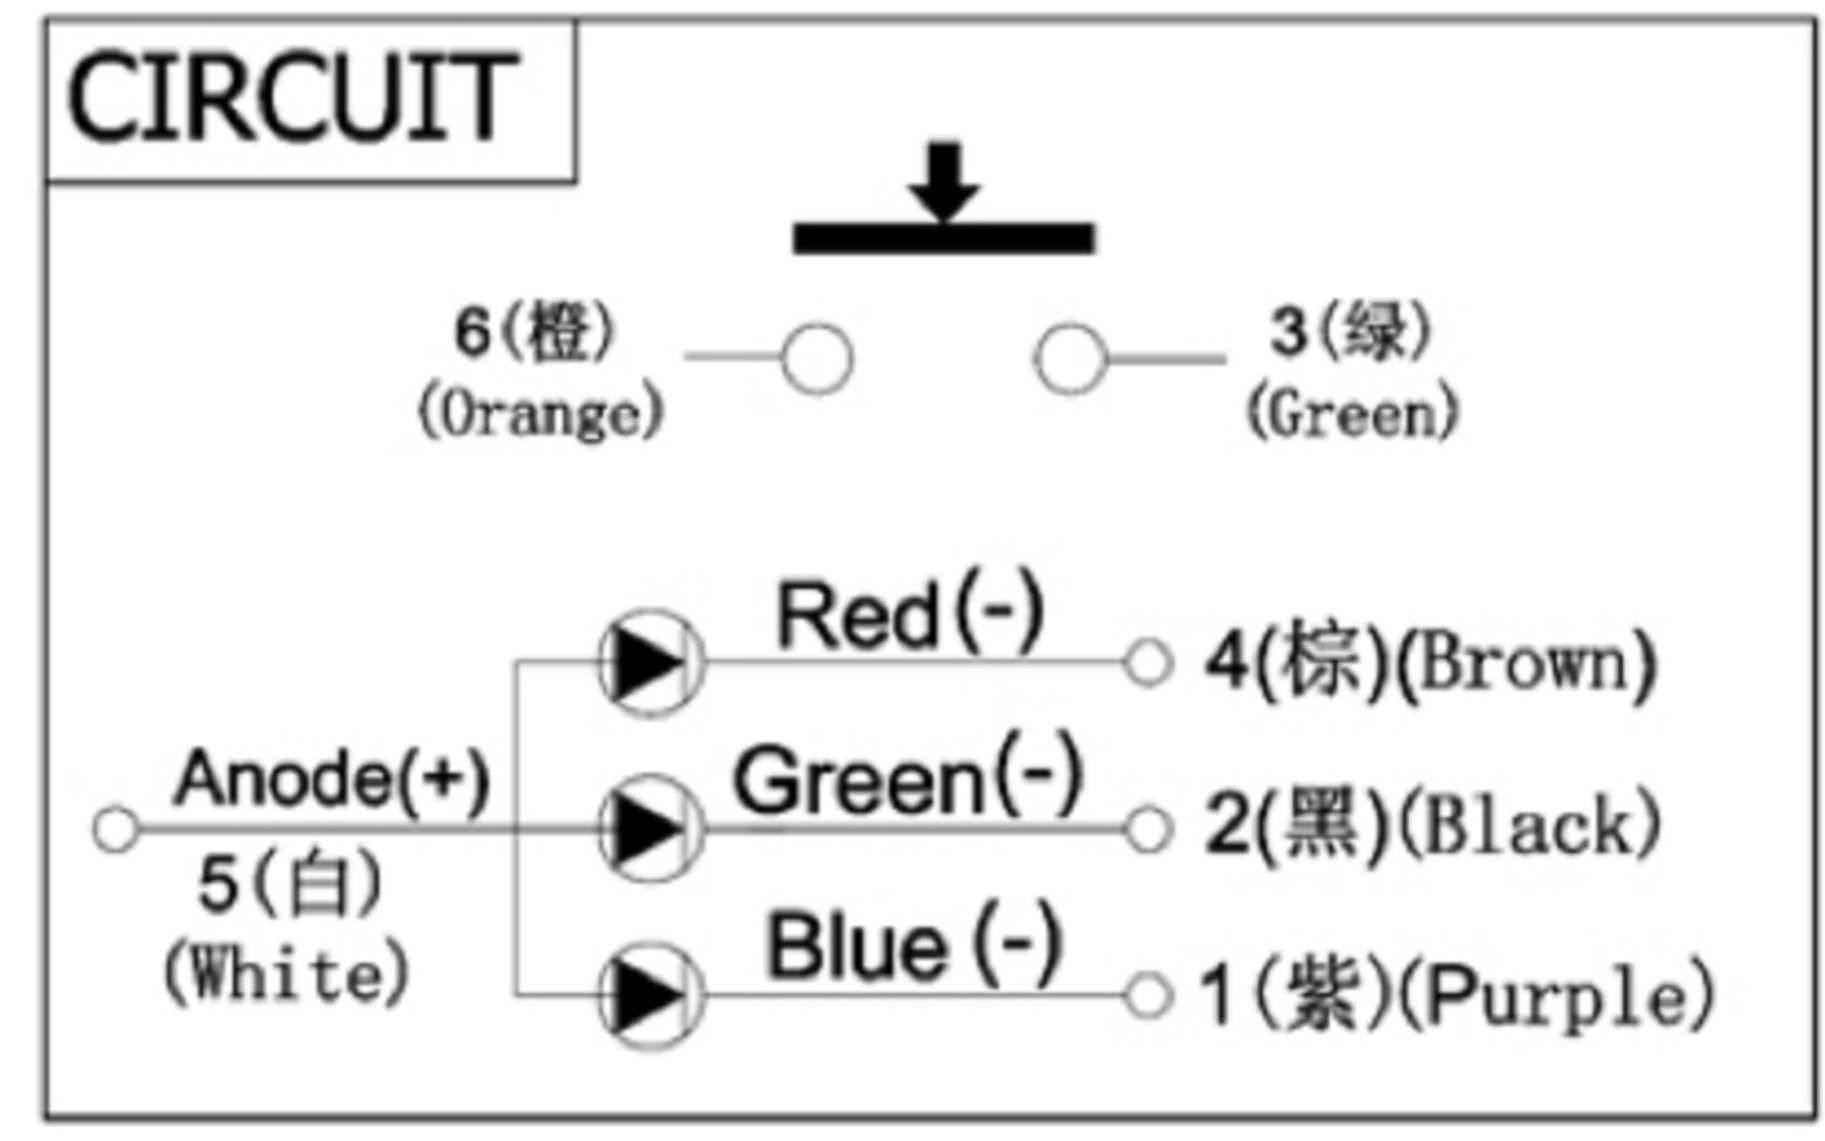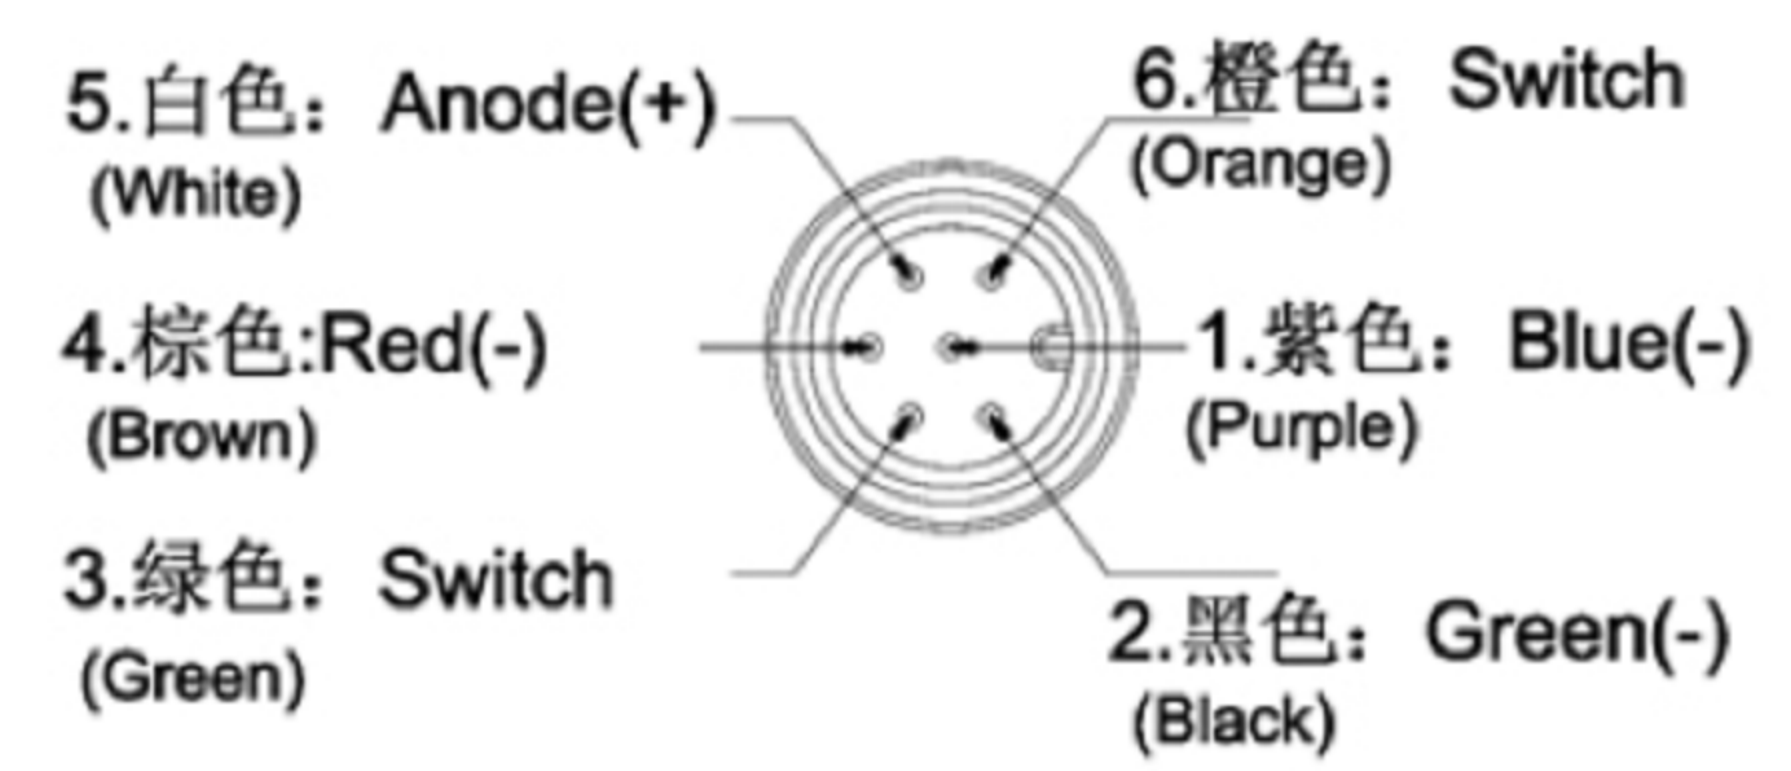

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH WITH LED
Jacky Chen	12/27/22			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	12/27/22	1 : 1		
SHEET NO.	1 of 1	PART NO.		
				SIZE A4
				VER R