




Rating: 10A 250VAC(UL CUL)  
 10A 250VAC(ENEC K-MARK)  
 10A 250VAC(CCC)

Insulation Resistance:DC 500V 100MΩ Min  
 Dielectric Strength:AC 2000V1minute  
 Fuse:Ø5.0x20mm

MATERIAL:  
 Base: PBT;  
 Cap: PA,UL rated: 94 V-2 Min. ;  
 Terminal: Copper alloy,Tin plated .

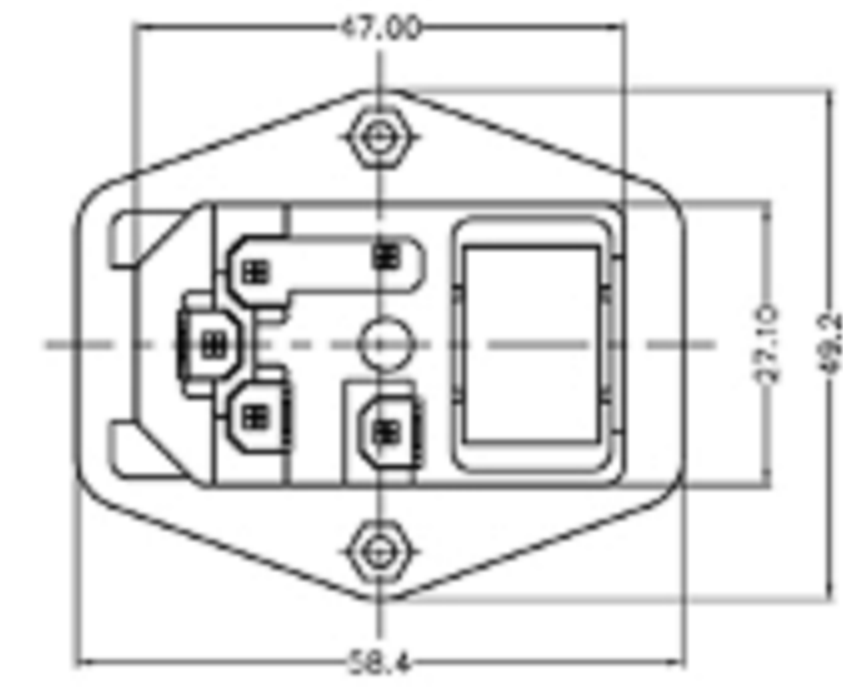

小号 (S)	中号 (M)	大号 (L)

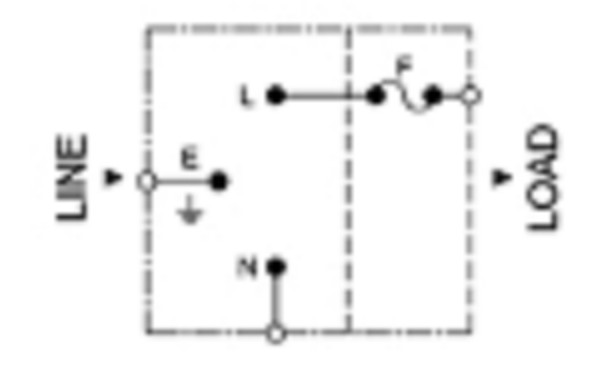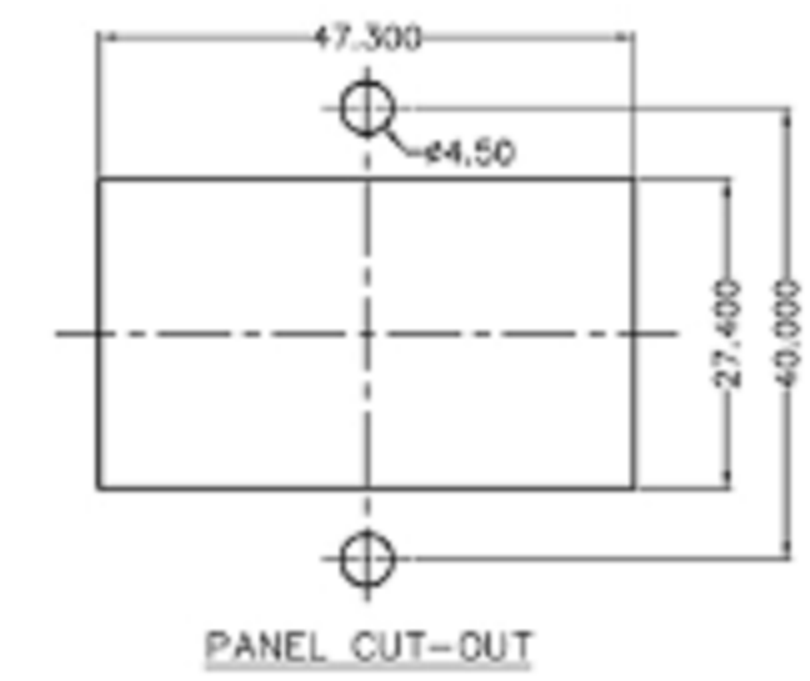

MATERIAL:  
 1.The tripping: SUS 304.  
 2.Screw/Nut: 12L15 Ni PLATE.



螺丝 (2pcs)	螺母 (2pcs)

ITEM NO.	DESCRIPTION	DRAWN	DATE

**广东科斯达电子科技有限公司**  
 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22	FINISH	MODLE	TACT SWITCH WITH LED
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	12/27/22	1 : 1	PART NO.	A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	VER
Tony Kao	12/27/22	1 of 1	PART NO.	R