

Fuse holder for overload protection

Rating: 10A 250VAC



Fuse: Ø5.0x20mm



Cap: Bayonet type

Operating Temperature: -10°C ~ +70°C

Welding method: Manual Soldering (350° C ± 5° C, 3s ± 0.5s)
: Wave-soldering

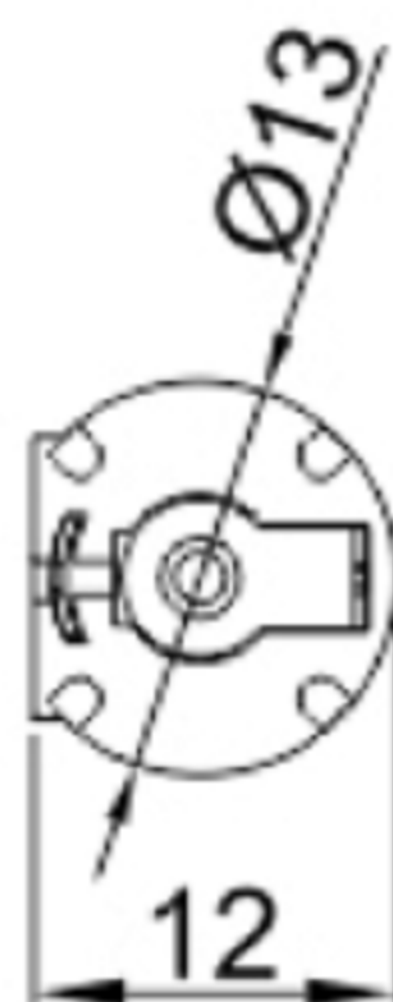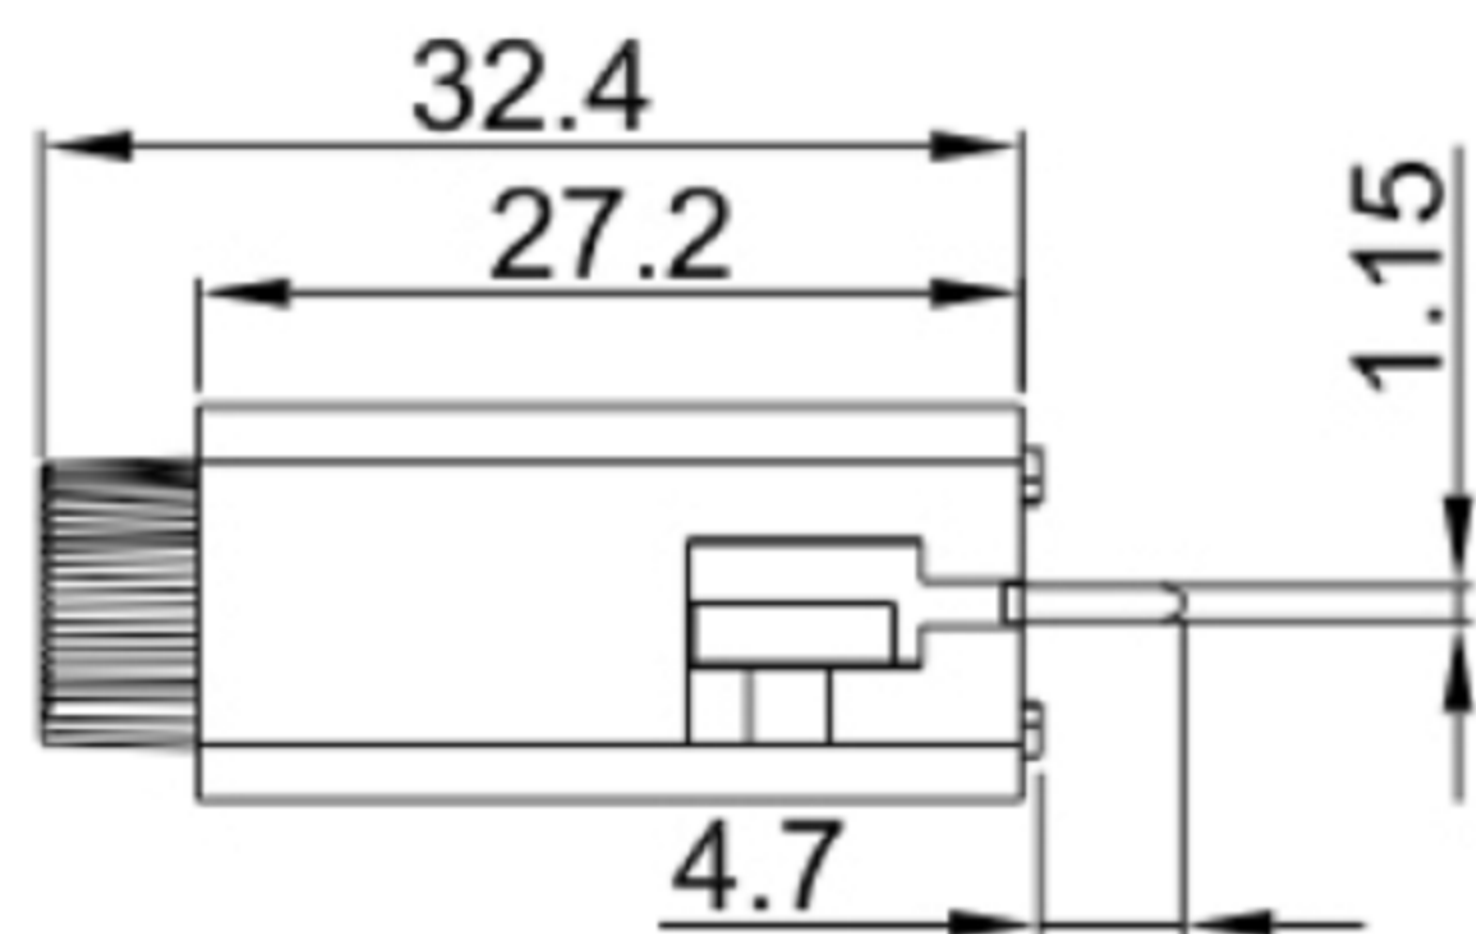


MATERIAL:

Housing: PA66, UL rated 94V2 min

Bayonet: PA66, UL rated 94V2 min

Terminal: Brass, silver or tin plated

P.C.B. LAYOUT

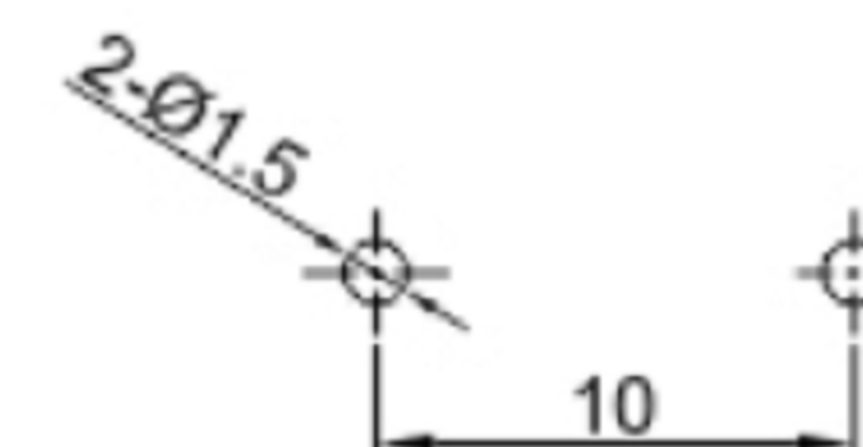


广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	12/27/22
CHECKED BY:	DATE
Jacky Chen	12/27/22
APPROVED BY:	DATE
Tony Kao	12/27/22

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH WITH LED
SCALE	1 : 1	DWG NO.	
SHEET NO.	1 of 1	PART NO.	
			SIZE A4
			VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE