REV	LTR	DESCRIPTION	DATE	REVISER	APPD

Pb Process Capable

RoHS Compliant 2002/95/EC

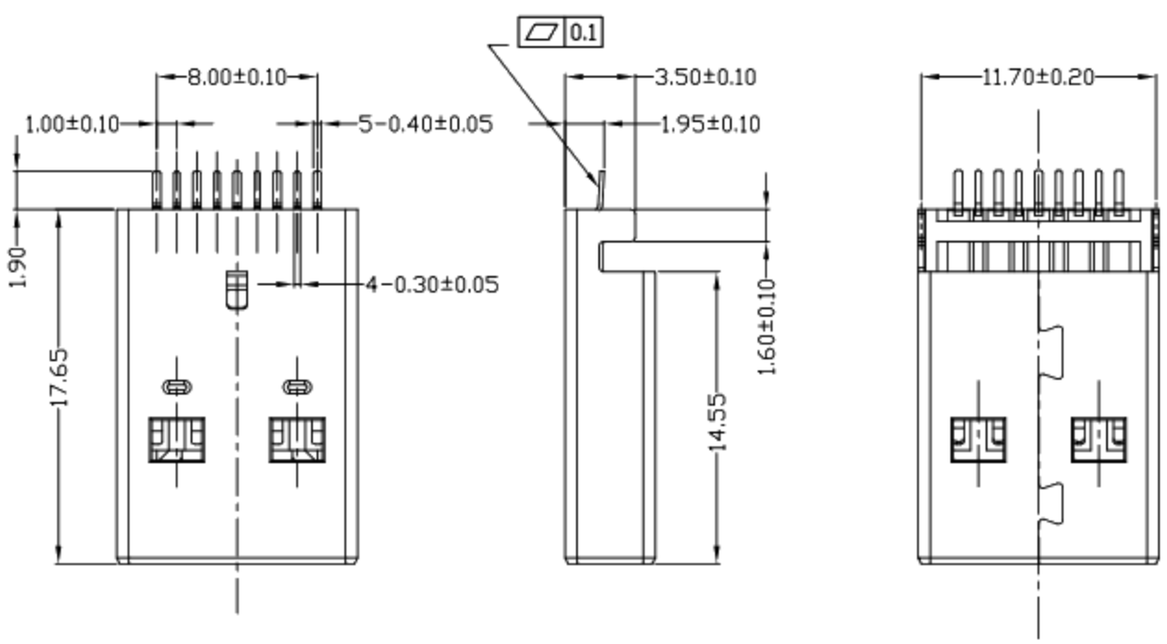



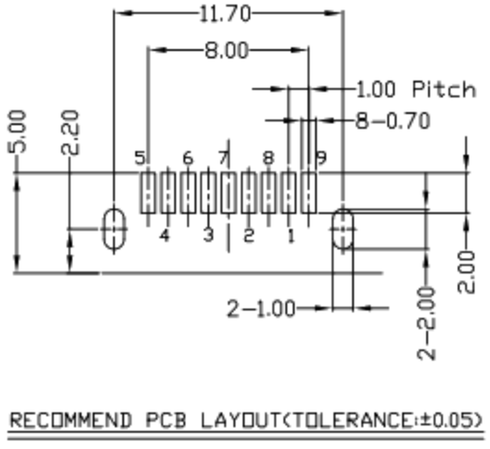

RECOMMEND PCB LAYOUT(TOLERANCE:±0.05)



NOTES:

1.ELECTRICAL:
- 1)VOLTAGE CURRENT RATING:1.5AMP,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 500V AC;
- 5)OPERATING TEMPERATURE:-55°C TO +85°C.

2.Mechanical:
- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED '▼'
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1:Au 1U"
5:Au 15U"
6:Au 30U"

W:WHITE
B:BLACK
BL:BLUE

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP+30%GF	1	PLATED NICKEL
2	SHELL	SPCC	1	UL94V-0
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN

X. ±0.35	X.° ±2°
.X ±0.3	.X° ±1°
.XX ±0.25	.XX°
.XXX ±0.15	.XXX°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

廣東科斯達電子科技有限公司

TITLE: USB AM 3.0 H=17.6MM 沉板1.9MM 无柱(外壳脚长3.50MM)锡脚1.9

DR: Ricky 2019/2/15

CHKD: Ricky 2019/2/15

APPD:

PART NO.:

DWG NO.:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	