



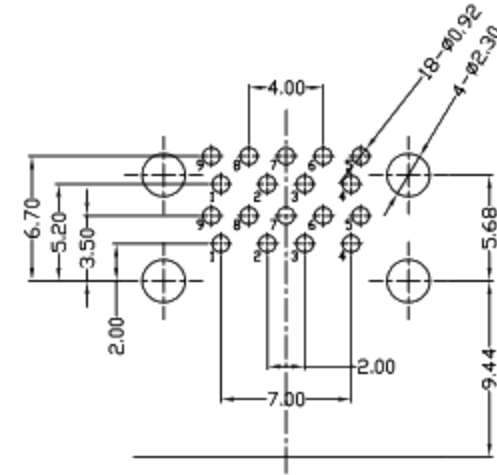





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

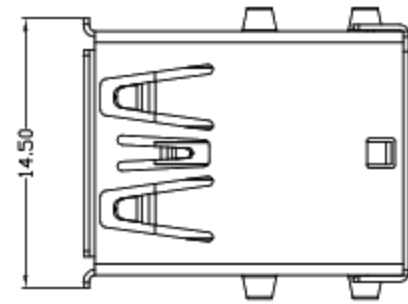

PIN ASSIGNMENT:

PIN NO.	1	2	3	4	5	6	7	8	9
Signal Name	VBUS	D-	D+	GND	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
Remark	USB2 Contact Pin				USB3 Contact Pin				

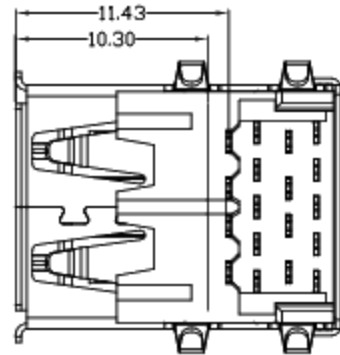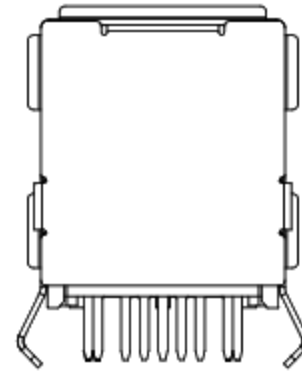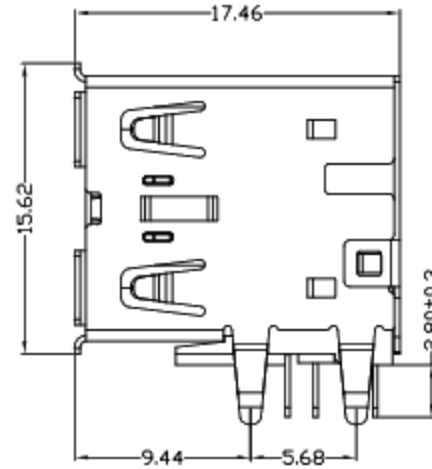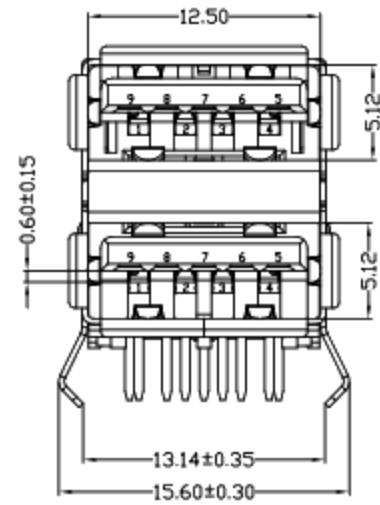

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.8AMP, 30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE:
    - 30mΩ MAX; INITIAL FOR VBUS AND GND CONTACTS.
    - 50mΩ MAX; INITIAL FOR ALL OTHER CONTACTS.
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
  - Durability: 1,500 cycles
- DIMENSIONS MARKED TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1Au 1U'	W:WHITE
5Au 15U'	B:BLACK
6Au 30U'	BL:BLUE
	1:PBT
	2:PA6T
	3:PA9T
	4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
6	CLIP	STAINLESS STEEL	1		X. ±0.35	X.* ±2'
5	HOUSING	PA9T+30%GF	1	UL94V-0	.X ±0.3	.X* ±1'
4	BACK COVER	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX*
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.15	.XXX*
2	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC	
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	Q'TY	
NO	PARTS	MATERIAL	QTY	FINISHING		

廣東科斯達電子科技有限公司

TITLE:	USB AF3.0 双层90度	PART NO.:	
DR:	Ricky 2017/11/07	DWG NO.:	
CHKD:	Ricky 2017/11/07	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	