



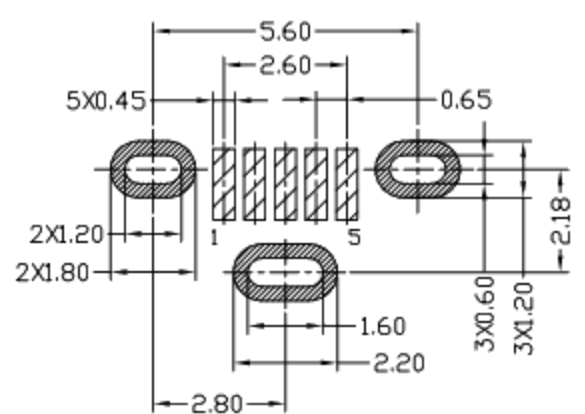

RoHS  
Compliant  
2002/95/EC





REV	LTR	DESCRIPTION	DATE	REVISER	APPD

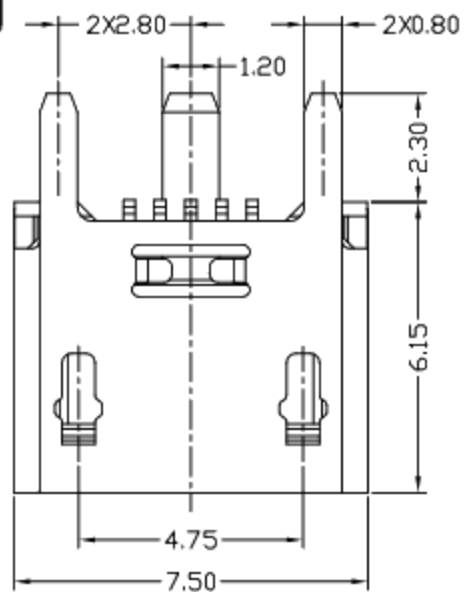


RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

PIN	NAME
5	GND
4	ID
3	D+
2	D-
1	VBUS

PIN ASSIGNMENT

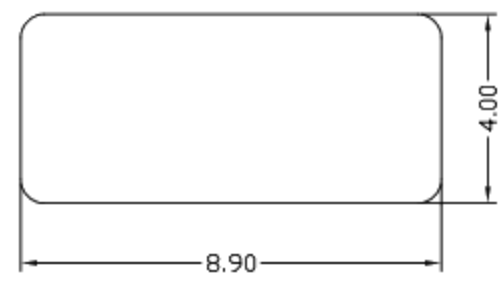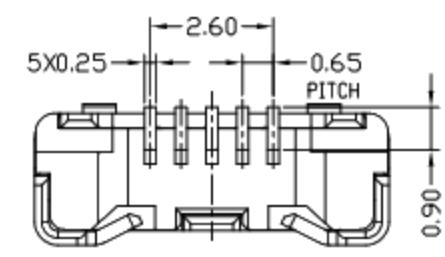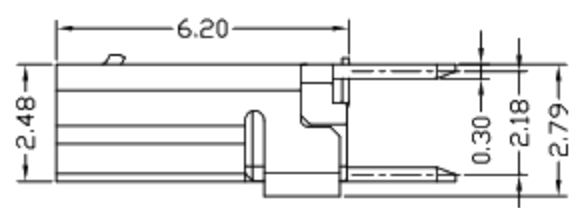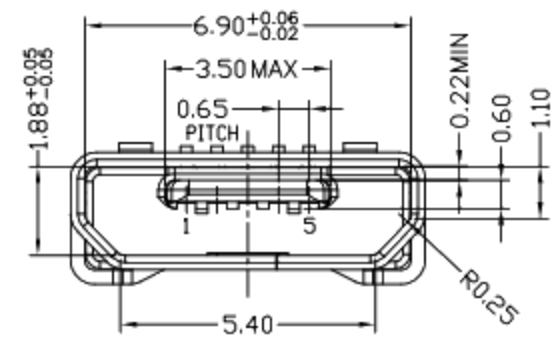


CAP DIMENSION SKETCH MAP

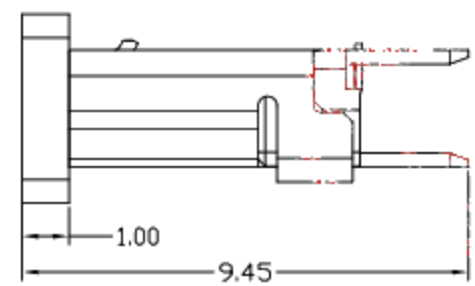

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 0.5AMP MAX, 30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
  - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 8N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5				
4	CAP	LCP+30%GF	1	UL94V-0
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	CONTACT	COPPER ALLOY	5	PLATED GOLD
1	HOUSING	LCP+30%GF	1	UL94V-0

UNITS	mm
x.X ±0.30	x.' ±10'
.XX ±0.20	.X' ±8'
.XXX ±0.10	.XX' ±5'

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

廣東科斯達電子科技有限公司

TITLE: MICRO USB B TYPE F 5P 180 度 SMT 无翻边外壳3支脚	PART NO.:			
DR: Ricky 2019/08/13	DWG NO.:			
CHKD: Ricky 2019/08/13	SCALE	SHEET	REV.	CUSTOMER DRAWING
APPD:	1:1	1/1	B	