

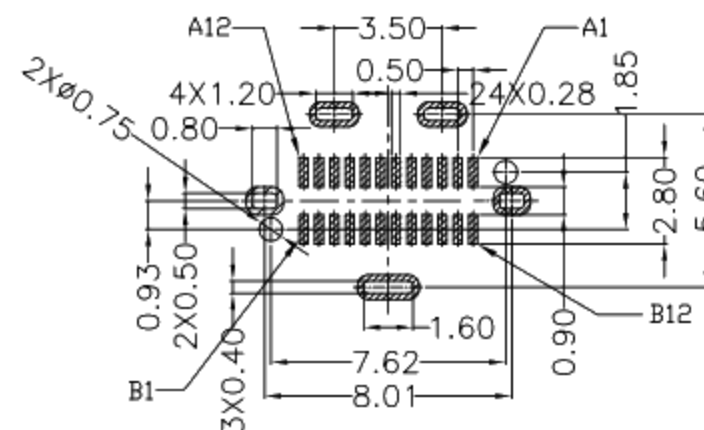
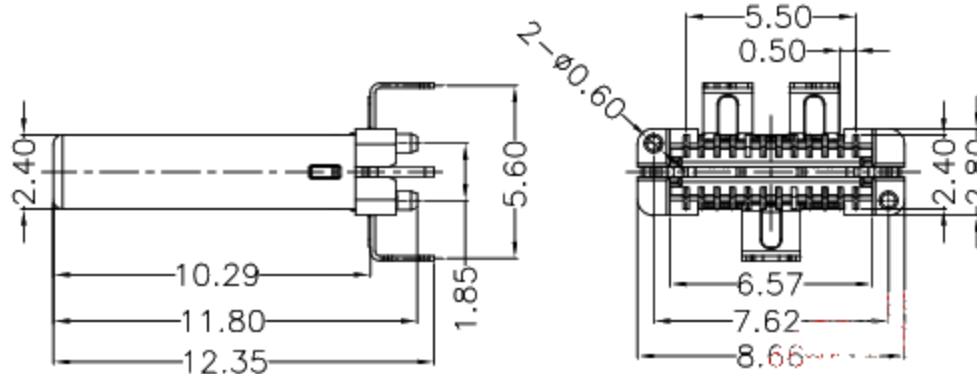
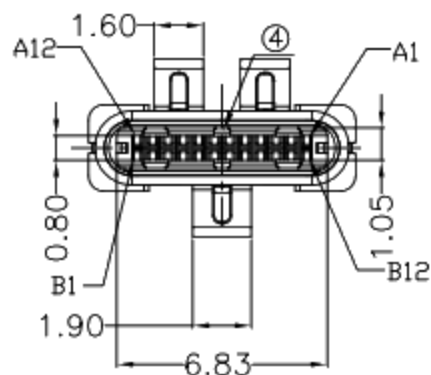


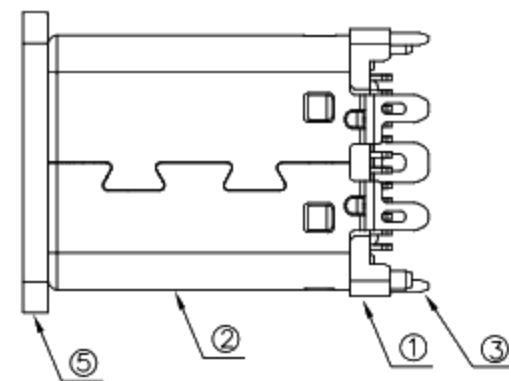


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

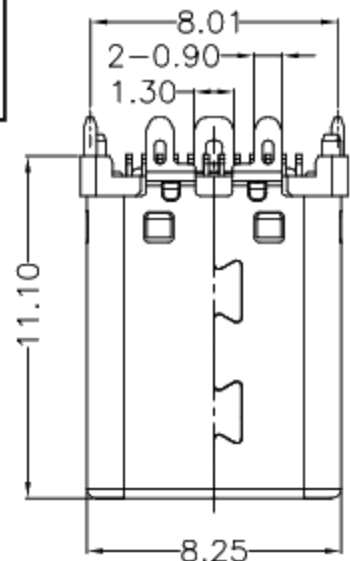

RECOMMENDED PCB LAYOUT (t=0.80±0.05)
COMPONENT SIDE (GENERAL TOLERANCE: ±0.05)

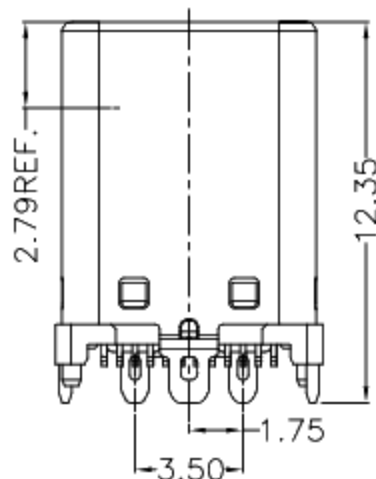


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



6	CONTACT	COPPER ALLOY	24	PLATED GOLD/NICKEL	x. ±0.35	x.* ±2'	UNITS	mm
5	COVER	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1'	MAT'L	
4	SPRING	STAINLESS STEEL	2		.XX ±0.20	.XX* ±0.5'	SEE NOTE	
3	LATCH	STAINLESS STEEL	1	PLATED TIN/NICKEL	.XXX ±0.10	.XXX*	FINISH	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL			SEE NOTE	
1	HOUSING	LCP+30%GF	2	UL94V-0			Q'TY	
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.

廣東科斯達電子科技有限公司

TITLE:
USB C M TYPE 直立式外置3支脚
间距1.75 H=11.10mm L=12.35mm
DR: Ricky 2017/11/16
CHKD: Ricky 2017/11/16
APPD:

PART NO.:		DWG NO.:	
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	