

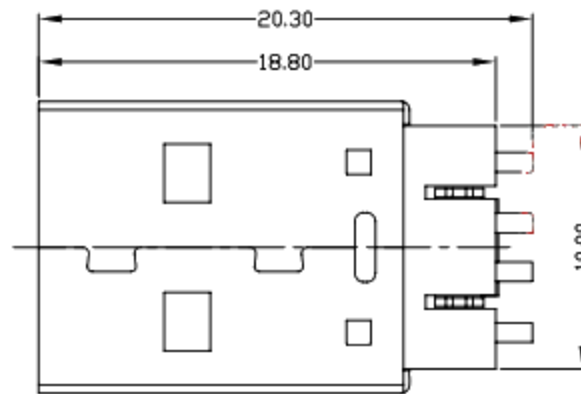
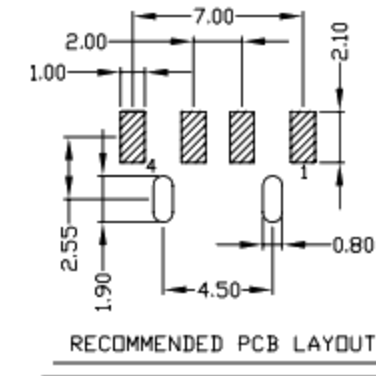



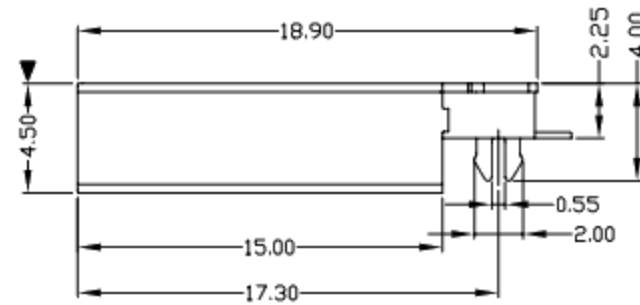

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

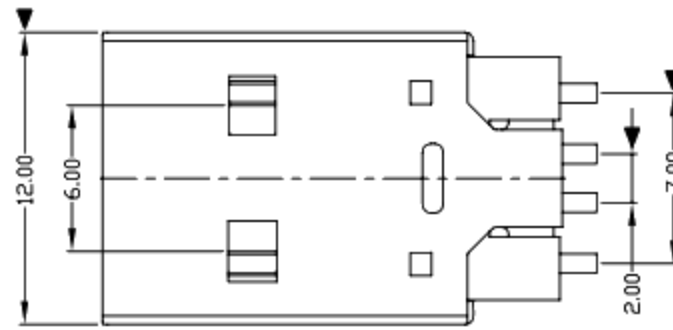

**NOTES:**

- ELECTRICAL:**
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:**
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1Au 1U\*  
6Au 30U\*

W: WHITE  
B: BLACK  
1PBT  
2PA6T  
3PA9T  
4LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ±0.35	X.* ±2'	UNITS	mm
.X ±0.3	.X* ±1'	MAT'L	SEE NOTE
.XX ±0.25	.XX*	FINISH	SEE NOTE
.XXX ±0.15	.XXX*	Q'TY	SEE NOTE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

**廣東科斯達電子科技有限公司**

TITLE: USB A/M 沉板式短体鱼叉脚		PART NO.:	
DR: gan 2013/2/25		DWG NO.:	
CHKD: gan 2013/2/25		SCALE	SHEET
APPD:		1:1	1/1
REV.	B	CUSTOMER DRAWING	