



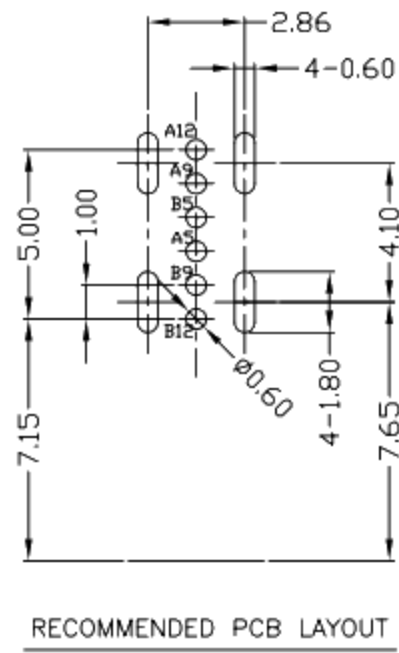



RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

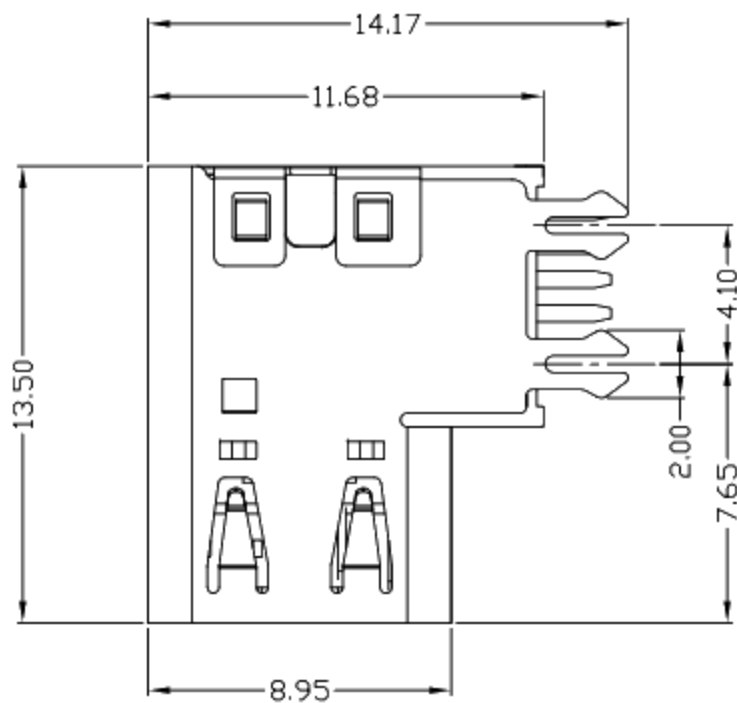

USB TYPE-C 6P
RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND

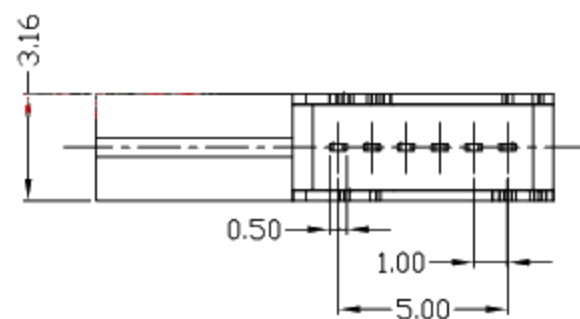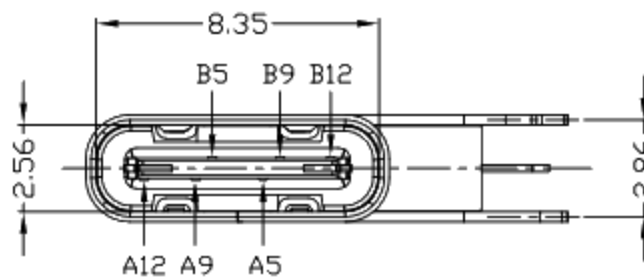

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 3A MIN FOR VBUS; VOLTAGE: 5VAC MAX 0.25A MIN FOR OTHER.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C ~ +80°C.
- Mechanical:
 - INSERTION FORCE: 5~20N.
 - EXTRACTION FORCE: 8~20N.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

1:Au 1U*
2:Au 3U*
5:Au 15U*
6:Au 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
5	SPRING	STAINLESS STEEL	1		X. ±0.35	X.* ±2*	UNITS	mm
4	COVER	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE
2	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

廣東科斯達電子科技有限公司

TITLE:
USB TYPE-C 插插式13.5 DIP 6P
禁高2.68 四支角叉脚

PART NO.:

DR: gan 2018/8/18

DWG NO.:

CHKD: gan 2018/8/18

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	