

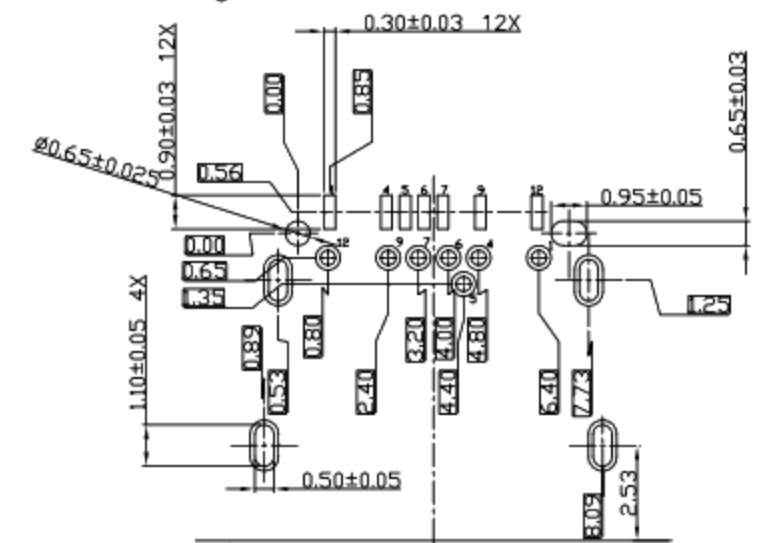
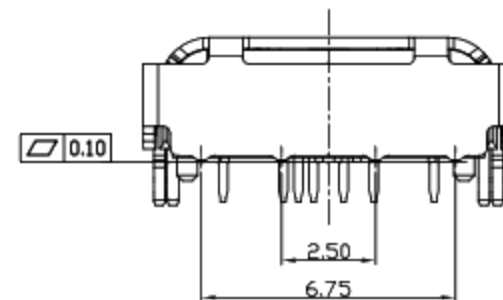
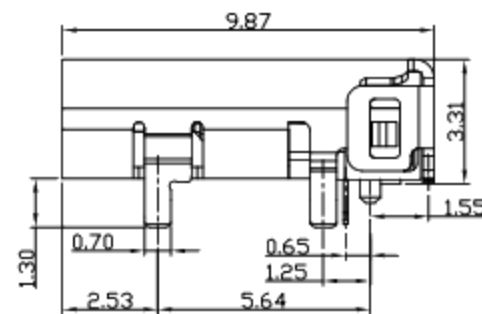
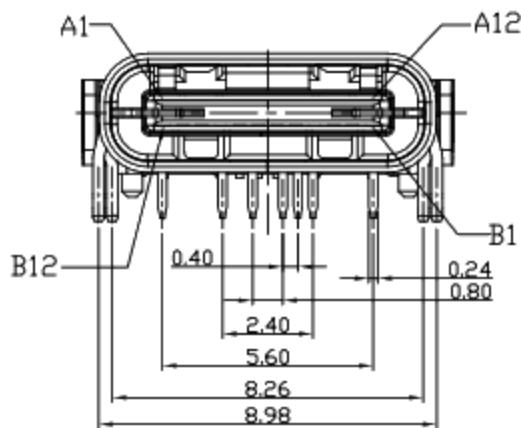


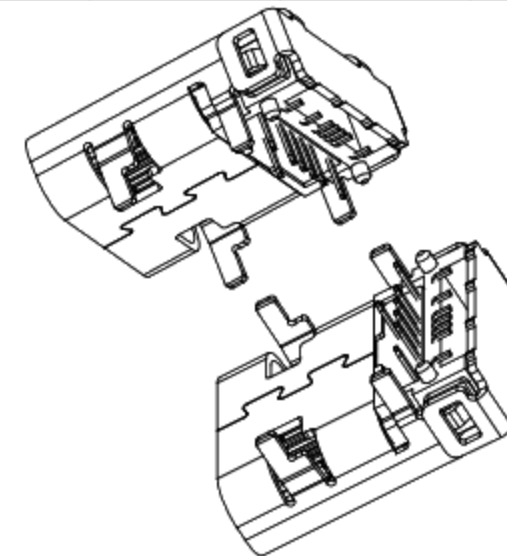


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

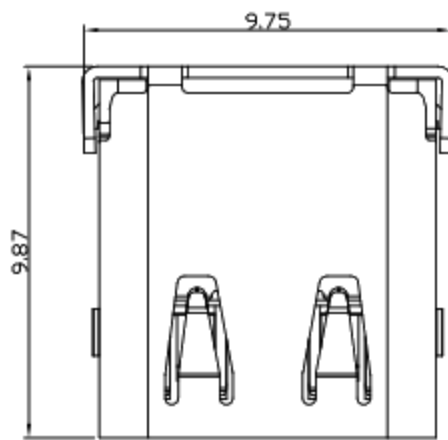

CONNECTOR FRONT EDGE  
RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm

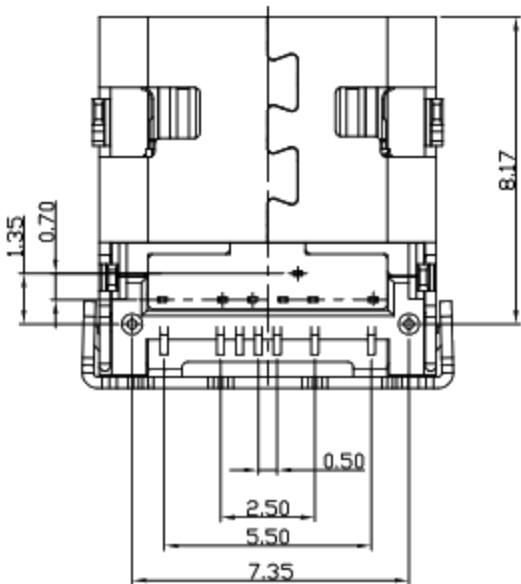

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 3AMP MAX;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 40mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
  - Mating Force: 5N~20N
  - Unmating Force: 8N~20N
  - Durability: 10,000 cycles
- DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



5	SHELL	STAINLESS STEEL	1	PLATED NICKEL/TIN	X. ±0.35	X.* ±2'	UNITS	mm
4	SPRING	STAINLESS STEEL	1		.X ±0.30	.X* ±1'	MAT'L	
3	SHIELDING PLATE	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.XX* ±0.5'	SEE NOTE	
2	CONTACT	COPPER ALLOY	14	PLATED GOLD/NICKEL	.XXX ±0.10	.XXX'	FINISH	SEE NOTE
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC

**廣東科斯達電子科技有限公司**

TITLE: USB C F 2.0 TYPE 14PIN  
DIP+SMT CONN

PART NO.:

DR: *Ricky* 2017/11/9

DWG NO.:

CHKD: *Ricky* 2017/11/9

APPD:

SCALE: 1:1

SHEET: 1/1

REV: B

CUSTOMER DRAWING