

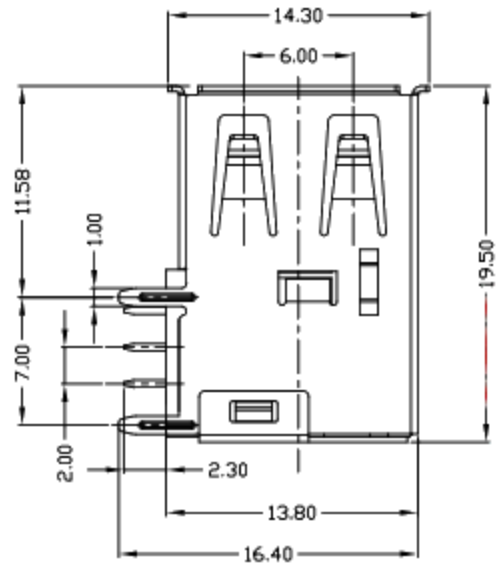
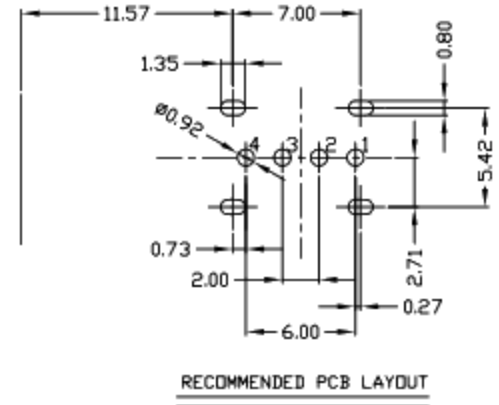
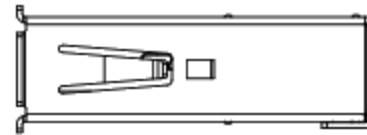
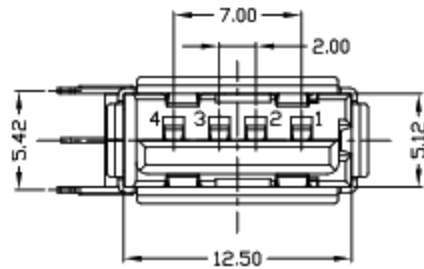


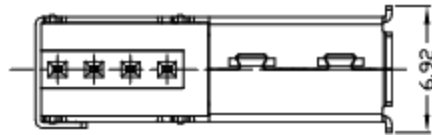

RoHS
Compliant
2002/95/EC


REV.	ECN. NO.	APPD.

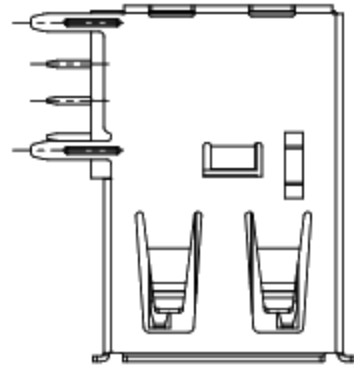

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

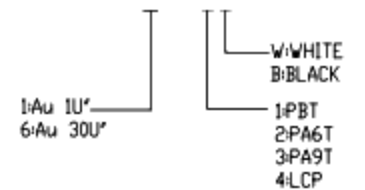

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X.	±0.35	X.* ±2'	UNITS	mm	廣東科斯達電子科技有限公司 TITLE: USB AF DIP 90度 側立式長體 反向 卷邊有后蓋直脚 DR: gan 2018/3/6 CHKD: gan 2018/3/6 APPD:	PART NO.:			
.X	±0.3	.X* ±1'	MAT'L	SEE NOTE		DWG NO.:			
.XX	±0.25	.XX*	FINISH	SEE NOTE		SCALE	SHEET	REV.	CUSTOMER
.XXX	±0.15	.XXX*	Q'TY	SEE NOTE		1:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

