

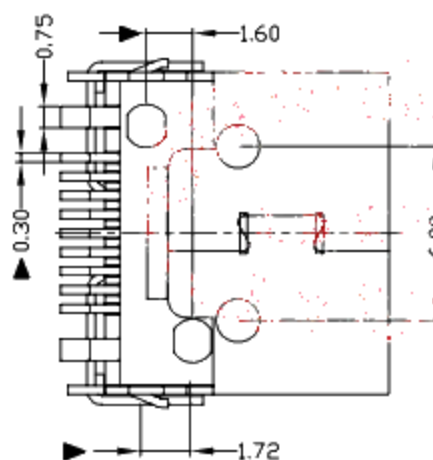
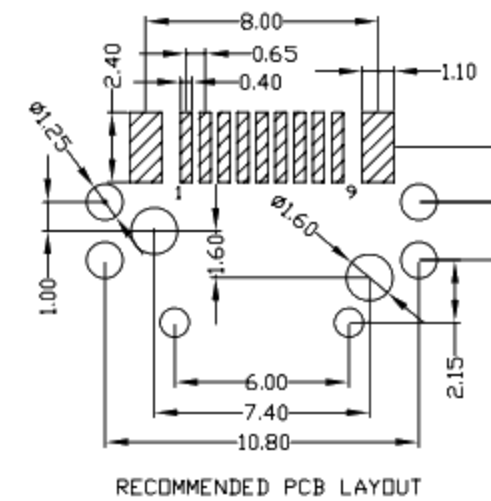
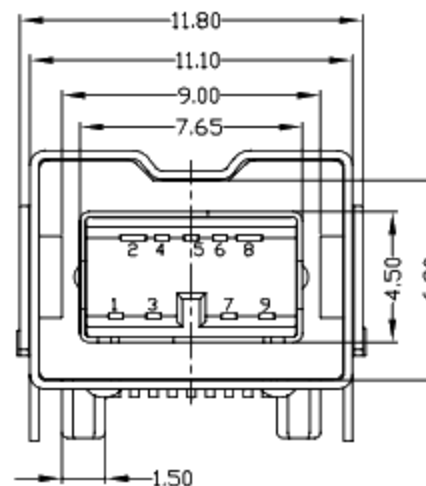
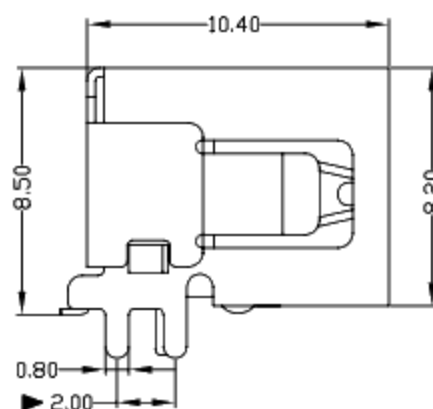


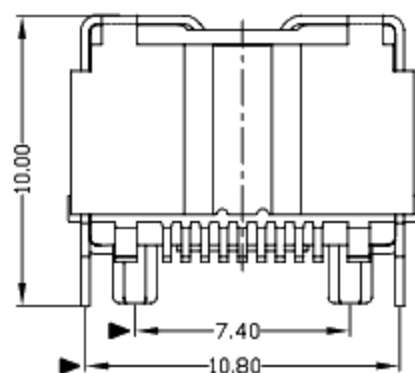

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

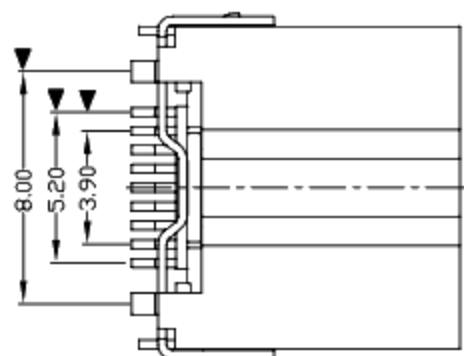

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

2:AU 3U'

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2'
3	OUTSIDE SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'
2	INNER SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD	.XXX ±0.15	.XXX'
					SEE NOTE	
					SEE NOTE	
					Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



廣東科斯達電子科技有限公司

TITLE:	IEEE 1394 9P/F SMT(斜脚)			PART NO.:
DR:	gan 2012/07/02			DWG NO.:
CHKD:	gan 2012/07/02			SCALE
APPD:	1:1	SHEET	1/1	REV.
				B
				CUSTOMER DRAWING