


REV.	ECN. NO.	APPD.

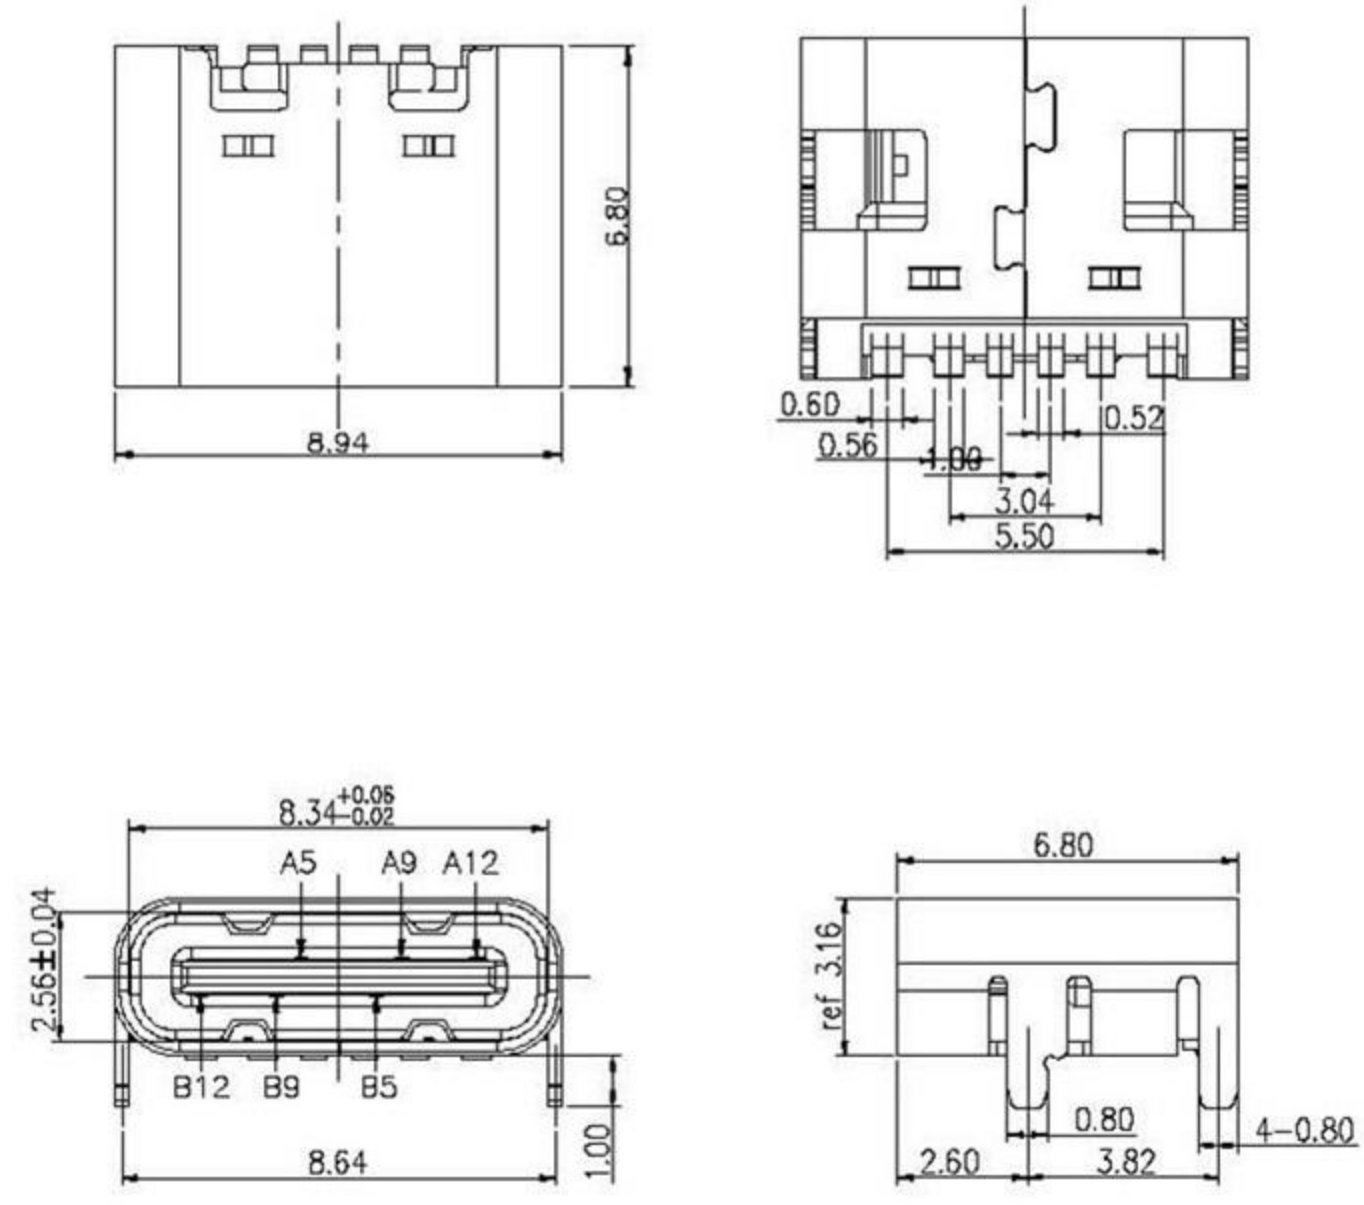

- NOTES:  
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
  2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
  3. TEMPERATURE RANGE: -30 °C ~ 85 °C
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. INSERTION FORCE :8N~35N
  7. UNMATING FORCE: 8N~35N
  8. DURABILITY:1500 CYCLES

X. ±0.50	X.* ± 2°	UNITS mm	廣東科斯達電子科技有限公司			
.X ±0.30	.X* ± 1°					
.XX ±0.10	.XX* ± 0.5°	MAT'L /	PART NO.	TITLE: IP68		
.XXX ± 0.05						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD		FINISH /	APPD: RADDM	DWG NO.: <b>USB connector</b>		
			CHKD: MARK			
			Q'TY /	DR: JANE CHOU 2019/07/11	SCALE	SHEET
				1/1	1/2	A2

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

由Autodesk 教育版产品制作

由Autodesk 教育版产品制作