REV.	ECN. NO.	APPD.

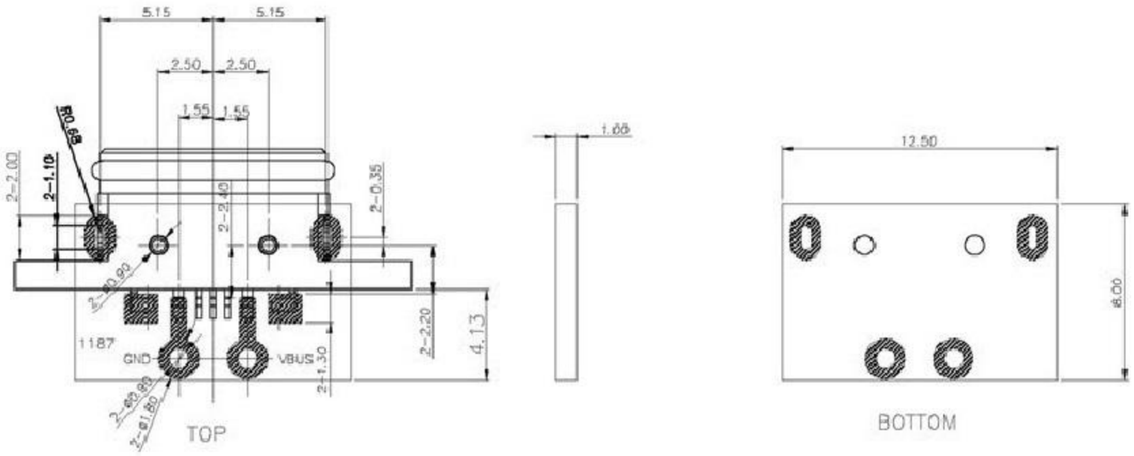

此PCB采取OSP工艺，且双面喷锡。

说明：
1. PCB厚度：T=1.00±0.05mm；字符：白色
2. 阴影部分为双面镀锡；
3. 图中所有孔均为镀铜通孔；

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: −30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X.° ± 2°	UNITS mm	廣東科斯達電子科技有限公司
.X ±0.30	.X° ± 1°		
.XX ±0.10	.XX° ± 0.5°	MAT'L	PART NO. / TITLE: IP68
.XXX ±0.05			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD		FINISH	APPD: RADOM / DWG NO.: USB connector
		Q'TY	CHKD: MARK
			DR: JANE CHOU 2019/07/11 / SCALE 1/1 / SHEET 1/2 / REV. A2