


- EDIFICATION:
1. RATING: DC 30V 17A
 2. CONTACT RESISTANCE:
CENTER PIN: 20mΩ MAX(INITIAL),
30mΩ MAX(FINAL).
DC_IN+/DC_IN-: 15mΩ MAX(INITIAL),
25mΩ MAX(FINAL).
 3. INSULATION RESISTANCE: 100 MΩ MIN.
 4. WITHSTAND VOLTAGE: 500 VAC
 5. INSERTION FORCE: 25N MAX.
 6. EXTRACTION FORCE: 6N MIN.
 7. DURABILITY: 5,000 CYCLES

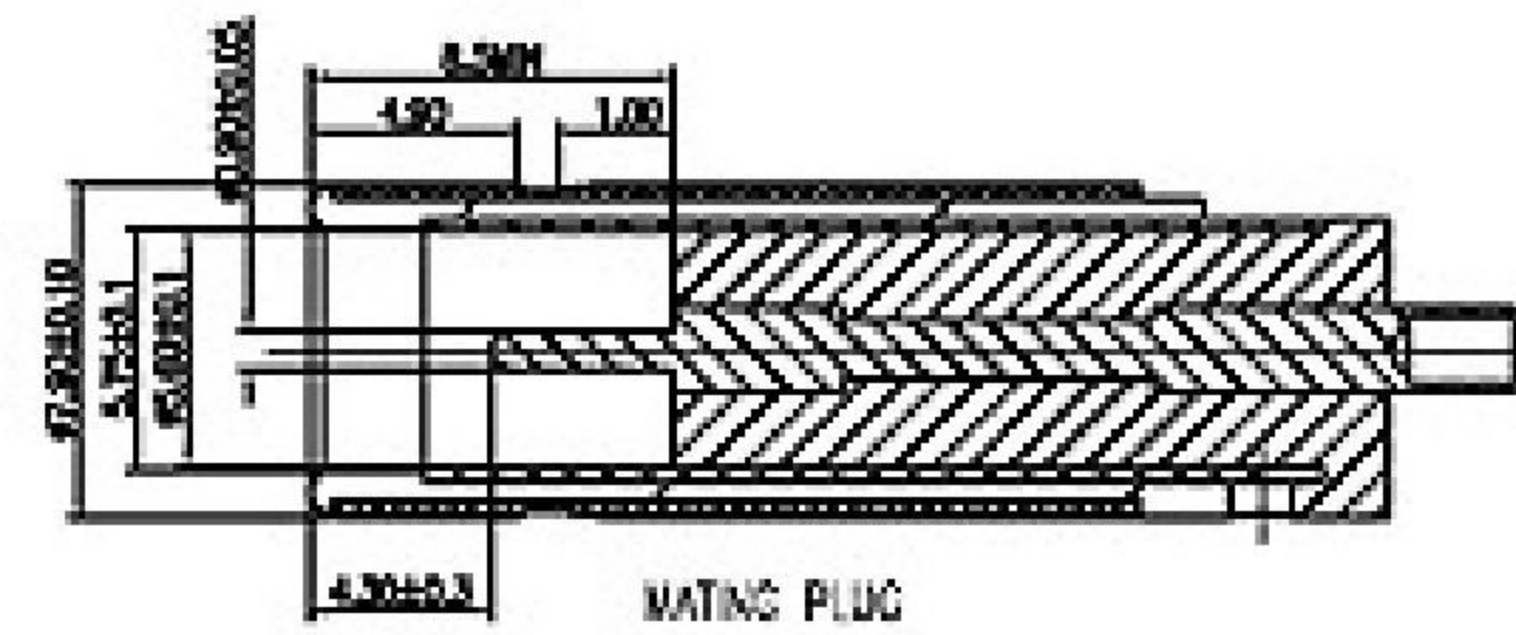

					ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE: DC POWER JACK		
ΔX					X.X	±0.2mm	DWN	DATE	VIEW:	PART NO.:		
ΔX					X.XX	±0.1mm	CHKD	DATE	UNIT: mm	DWG NO.:		
ΔX					X.XXX	±0.05mm	APPD	DATE	SIZE: A4			
MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	廣東科斯達電子科技有限公司			WEIGHT	SHEET	REVISION
										1.0g	1/1	A0